


TT3050

TT-300KBBD10-...../US/

Temperature sensors

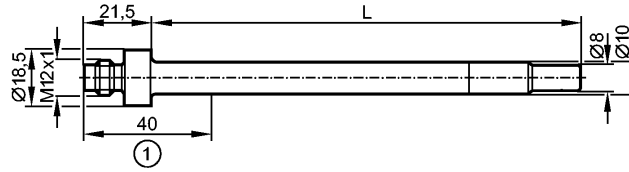

1: plug area

Made in USA



Product characteristics

Temperature sensor for connection to evaluation units
Connector
Installation length: 360 mm
Gold-plated contacts
Connection to control monitor TP / TR
Measuring range: -40...150 °C / -40...302 °F
Measuring element: 1 x Pt 1000, to DIN EN 60751, class A

Application

Application	liquids and gases
Minimum installation depth [mm]	15

Electrical data

Connection to control monitor	TP / TR
Protection class	III

Measuring / setting range

Measuring range [°C/°F]	-40...150 / -40...302
-------------------------	-----------------------

Accuracy / deviations

Accuracy	± (0.15 K + 0.002 x t)
----------	--------------------------

Reaction times

Dynamic response T05 / T09 [s]	1 / 3 *
--------------------------------	---------

Environment

Pressure rating [bar]	160
Ambient temperature [°C]	-25...80, for the plug area
Protection	IP 68 / IP 69K

Tests / approvals

Shock resistance	DIN EN 60068-2-27:	50 g (11 ms)
Vibration resistance	DIN EN 60068-2-6:	5 g (10...2000 Hz)
MTTF [Years]		22831

Mechanical data

Materials (wetted parts)	stainless steel 316L / 1.4404
Probe diameter [mm]	10
Probe length L [mm]	360
Installation length [mm]	360
Housing materials	stainless steel 316L / 1.4404
Weight [kg]	0.101

Electrical connection


Connection	M12 connector; Gold-plated contacts
------------	-------------------------------------

Wiring

TT3050

TT-300KBBD10-...../US/

Temperature sensors



Remarks

Remarks

*) according to DIN EN 60751
The values for accuracy apply to flowing water.

Pack quantity

[piece]

1