

**TERMSERIES
RSS113024F**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Product image

Similar to illustration

TERMSERIES accessories include:

- Spare relay
- Base
- Partition plates
- Cross-connections
- Power-feed modules

General ordering data

Type	RSS113024F
Order No.	1454430000
Version	TERMSERIES, Relay, Number of contacts: 1 CO contact AgNi, Rated control voltage: 24 V DC, Continuous current: 6 A, Plug-in connection
GTIN (EAN)	4050118261042
Qty.	18 pc(s).

Creation date March 27, 2020 8:52:50 AM CET

Catalogue status 20.03.2020 / We reserve the right to make technical changes.

**TERMSERIES
RSS113024F**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data**Dimensions and weights**

Width	5 mm	Width (inches)	0.197 inch
Height	28 mm	Height (inches)	1.102 inch
Depth	15 mm	Depth (inches)	0.591 inch
Net weight	5.1 g		

Temperatures

Humidity	5...85 % rel. humidity, no condensation	Operating temperature, max.	85 °C
Operating temperature, min.	-40 °C	Storage temperature, max.	85 °C
Storage temperature, min.	-40 °C	Operating temperature	-40 °C...85 °C
Storage temperature	-40 °C...85 °C		

Rated data UL

Certificate No. (cURus)	E475330
-------------------------	---------

Input

Rated control voltage	24 V DC	Rated current DC	7 mA
Power rating	170 mW	Pull-in/drop-out voltage, typ.	18 V / 1.2 V DC
Coil resistance	3390 Ω ± 15 %		

Output

Rated switching voltage	250 V AC	Max. switching voltage, AC	250 V
Max. switching voltage, DC	250 V	Continuous current	6 A
Inrush current	20 A / 20 ms	AC switching capacity (resistive), max.	1500 VA
DC switching capacity (resistive), max.	144 W @ 24 V	Switch-on delay	< 8 ms
Switch-off delay	< 4 ms	Min. switching power	1 mA @ 24 V, 10 mA @ 10 V, 100 mA @ 5 V
Max. switching frequency at rated load	0.1 Hz		

Contact data

Contact type	1 CO contact (AgNi)	Mechanical service life	10 x 10 ⁶ switching cycles
--------------	---------------------	-------------------------	---------------------------------------

General data

Test button	No	Mechanical switch position indicator	No
Colour	white	UL 94 flammability rating	V-0

Insulation coordination

Protection degree	IP67	Dielectric strength, Input/Output	4 kV _{eff} / 1 Min.
Impulse withstand voltage at input and output	6 kV (1.2/50 μs)	Creepage and clearance distance input - output	≥ 5.5 mm
Dielectric strength of open contact	1 kV _{eff} / 1 min		

Further details of approvals / standards

Certificate No. (cURus)	E475330
-------------------------	---------

Data sheet

**TERMSERIES
RSS113024F**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data

Connection data

Wire connection method Plug-in connection

Classifications

ETIM 6.0	EC001437	ETIM 7.0	EC001437
eClass 9.0	27-37-16-01	eClass 9.1	27-37-16-01
eClass 10.0	27-37-16-01		

Approvals

Approvals




ROHS Conform

**TERMSERIES
RSS113024F**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com


Drawings

Wiring diagram

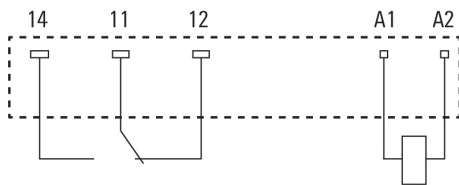


View of Pins from below

Graph

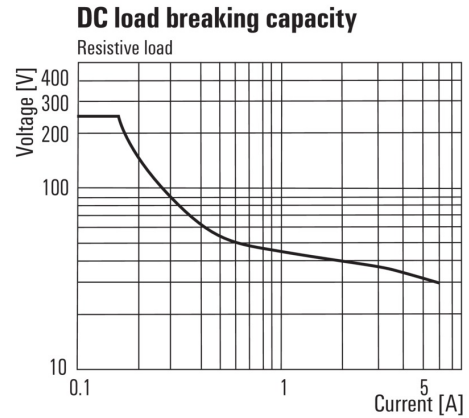


DC load limit curve

Graph

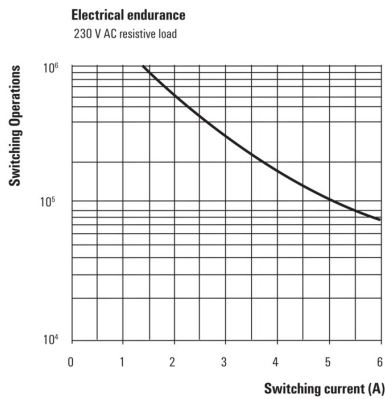

Electrical service life
230 V AC resistive load

Dimensional drawing

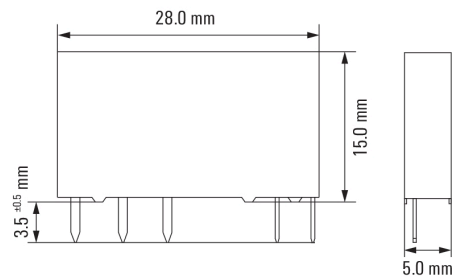

TERMSERIES RSS113024F

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Accessories

Tension clamp connection



TERMSERIES accessories include:

- Spare relay
- Base
- Partition plates
- Cross-connections
- Power-feed modules

General ordering data

Type	TRZ 24VDC 1CO EMPTY	Version
Order No.	1123370000	TERMSERIES, Relay bases, Number of contacts: 1 CO contact, Rated control voltage: 24 V DC $\pm 20\%$, Continuous current: 10 A, Tension-clamp connection
GTIN (EAN)	4032248905324	
Qty.	10 pc(s).	
Type	TRZ 24VUC 1CO EMPTY	Version
Order No.	1123380000	TERMSERIES, Relay bases, Number of contacts: 1 CO contact, Rated control voltage: 24 V UC $\pm 10\%$, Continuous current: 10 A, Tension-clamp connection
GTIN (EAN)	4032248905195	
Qty.	10 pc(s).	
Type	TRZ 24-230VUC 1CO EMPTY	Version
Order No.	1123450000	TERMSERIES, Relay bases, Number of contacts: 1 CO contact, Rated control voltage: 24...230 V UC $\pm 10\%$, Continuous current: 10 A, Tension-clamp connection
GTIN (EAN)	4032248905508	
Qty.	10 pc(s).	
Type	TRZ 48VUC 1CO EMPTY	Version
Order No.	1123390000	TERMSERIES, Relay bases, Number of contacts: 1 CO contact, Rated control voltage: 48 V UC $\pm 10\%$, Continuous current: 10 A, Tension-clamp connection
GTIN (EAN)	4032248905331	
Qty.	10 pc(s).	

Screw connection



TERMSERIES accessories include:

- Spare relay
- Base
- Partition plates
- Cross-connections
- Power-feed modules

General ordering data

Type	TRS 48VUC 1CO EMPTY	Version
Order No.	1123270000	TERMSERIES, Relay bases, Number of contacts: 1 CO contact, Rated control voltage: 48 V UC $\pm 10\%$, Continuous current: 10 A, Screw connection
GTIN (EAN)	4032248905423	
Qty.	10 pc(s).	
Type	TRS 24-230VUC 1CO EMPTY	Version
Order No.	1123330000	TERMSERIES, Relay bases, Number of contacts: 1 CO contact, Rated control voltage: 24...230 V UC $\pm 10\%$, Continuous current: 10 A, Screw connection
GTIN (EAN)	4032248905614	
Qty.	10 pc(s).	

TERMSERIES RSS113024F

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Accessories

Type	TRS 24VUC 1CO EMPTY	Version
Order No.	1123250000	TERMSERIES, Relay bases, Number of contacts: 1 CO contact, Rated control voltage: 24 V UC $\pm 10\%$, Continuous current: 10 A, Screw connection
GTIN (EAN)	4032248905713	
Qty.	10 pc(s).	
Type	TRS 24VDC 1CO EMPTY	Version
Order No.	1123240000	TERMSERIES, Relay bases, Number of contacts: 1 CO contact, Rated control voltage: 24 V DC $\pm 20\%$, Continuous current: 10 A, Screw connection
GTIN (EAN)	4032248905485	
Qty.	10 pc(s).	

PUSH IN connection



TERMSERIES accessories include:

- Spare relay
- Base
- Partition plates
- Cross-connections
- Power-feed modules

General ordering data

Type	TRP 48VUC 1CO EMPTY	Version
Order No.	2618920000	TERMSERIES, Relay bases, Number of contacts: 1 CO contact, Rated control voltage: 48 V UC $\pm 10\%$, Continuous current: 10 A, PUSH IN with actuator
GTIN (EAN)	4050118669916	
Qty.	10 pc(s).	
Type	TRP 24VUC 1CO EMPTY	Version
Order No.	2618910000	TERMSERIES, Relay bases, Number of contacts: 1 CO contact, Rated control voltage: 24 V UC $\pm 10\%$, Continuous current: 10 A, PUSH IN with actuator
GTIN (EAN)	4050118669923	
Qty.	10 pc(s).	
Type	TRP 24VDC 1CO EMPTY	Version
Order No.	2618870000	TERMSERIES, Relay bases, Number of contacts: 1 CO contact, Rated control voltage: 24 V DC $\pm 20\%$, Continuous current: 10 A, PUSH IN with actuator
GTIN (EAN)	4050118669961	
Qty.	10 pc(s).	

Data sheet

**TERMSERIES
RSS113024F**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Drawings

Miscellaneous

Type code	RSS				
Type	RSS				
Type of construction	1 Vertical, washable				
Type of contact	1 1 Changeover contact				
Contact material	0 AgSnO ₂ 2 AgNi hard gold plated 3 AgNi				
					Coil 005 5 V DC 012 12 V DC 024 24 V DC 048 48 V DC 060 60 V DC

Type codes