

ADAM-4510/S


ADAM-4520

ADAM-4521

RS-422/485 Repeater

Isolated RS-232 to RS-422/485 Converter

Addressable RS-422/485 to RS-232 Converter

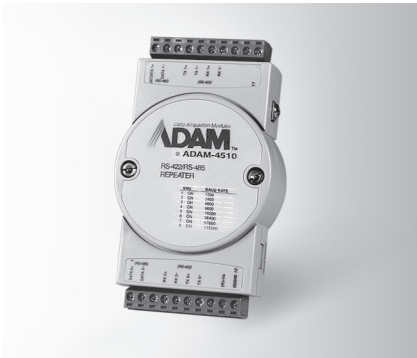

ADAM-4510/4510S



ADAM-4520



ADAM-4521



Specifications

General

- **Connectors** 2 x plug-in terminal blocks (#14 ~ 22 AWG) (RS-422/485)
- **Isolation Voltage** 3,000 V_{DC} (ADAM-4510S)
- **Power Consumption** 1.4 W @ 24 V_{DC}

Serial Communications

- **Input** RS-485 (2-wire) or RS-422 (4-wire)
- **Output** RS-485 (2-wire) or RS-422 (4-wire)
- **Speed Modes (bps)** 1,200, 2,400, 4,800, 9,600, 19.2 k, 38.4 k, 57.6 k, 115.2 k, RTS control and RS-422 (switchable)

Specifications

General

- **Connectors** 1 x plug-in terminal block (#14 ~ 22 AWG) (RS-422/485)
1 x DB9-F (RS-232)
- **Isolation Voltage** 3,000 V_{DC}
- **Power Consumption** 1.2 W @ 24 V_{DC}

Serial Communications

- **Input** RS-232 (DB9)
- **Output** RS-485 (2-wire) or RS-422 (4-wire)
- **Speed Modes (bps)** 1,200, 2,400, 4,800, 9,600, 19.2 k, 38.4 k, 57.6 k, 115.2 k, RTS control and RS-422 (switchable)

Specifications

General

- **Connectors** 1 x plug-in terminal block (#14 ~ 22 AWG) (RS-422/485)
1 x DB9-F (RS-232)
- **Isolation Voltage** 1,000 V_{DC}
- **Power Consumption** 1.0 W @ 24 V_{DC}
- **Built-in microprocessor and watchdog timer**

Serial Communications

- **Input** RS-485 (2-wire) or RS-422 (4-wire)
- **Output** RS-232 (DB9)
- **Speed Modes (bps)** 300, 600, 1,200, 2,400, 4,800, 9,600, 19.2 k, 38.4 k, 57.6 k, 115.2 k (software configurable)
- **RS-232 and 485 can be set to different baudrates**
- **RS-485 surge protection and automatic RS-485 data flow control**
- **Software configurable to either addressable or non-addressable mode**

Common Specifications

General

- **Power Input** Unregulated 10 ~ 30 V_{DC} w/ power reversal protection

Environment

- **Operating Humidity** 5 ~ 95% RH
- **Operating Temperature** -10 ~ 70°C (14 ~ 158°F)
- **Storage Temperature** -25 ~ 85°C (-13 ~ 185°F)

Ordering Information

- **ADAM-4510** RS-422/485 Repeater
- **ADAM-4510S** Isolated RS-422/485 Repeater
- **ADAM-4520** Isolated RS-232 to RS-422/485 Converter
- **ADAM-4521** Addressable RS-422/485 to RS-232 Converter