

Technical Data


Safety Relay Combination

Series SCR

Description **SCR ON4-W22-3.6-S**

Article number **6075111020**

Assembly and function
(function circuit diagram)

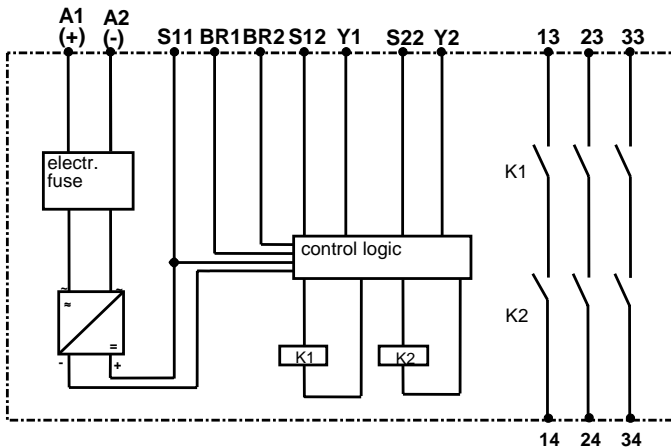

A1, A2
connection operation voltage

13-14, 23-24, 33-34
safety output (N.O.)

Y1-Y2
START-button

S12, S22
inputs for the ESPE outputs

BR1-BR2
bridge over BR1 and BR2 enables automatic START

Electrical data

Supply voltage	U_e	24V DC
Voltage range		0,9 ... 1,1 U_e
Power consumption appr.		2,5 W
Inrush current S12, S22		390 mA
Permanent current S12, S22		20 mA

Conductor data

conductor connection	2 x 2,5 mm ² solid wire 2 x 1,0 mm ² strand with wire end ferrule DIN VDE 46228
Max. conductor length (input circuit)	100 m each conductor
Conductor cross-section	2 x 1,5 mm ²
Capacity	150 nF/km
Resistance	11,7 Ohm/km

This document will not become the contractual basis; the details included herein do not constitute any descriptions of expected conditions, so that warranties/claims for defects on account of possible variations of the actual qualities from the qualities described herein are explicitly excluded. All rights reserved. Specifications subject to change without notice!

Date of issue: 13.07.2010 / Page 1 of 2
Document: 6075111020_en.doc / Status: 1 / 2487-10

Technical Data

Safety Relay Combination



Contact data	
Contact configuration	3 N.O. contacts
Contact type	Relay forcibly guided contacts
Contact material	AgSnO ₂ or comparable material
Switching voltage	24V DC
Switching current	6 A
Max. switching capacity	1500 VA (ohms load)
Mechanical life	10 ⁷ operations
Electrical life	10 ⁵ operations
Creepage and clearance distances (DIN VDE 0160)	at pollution grade 2
	Basis isolation: Voltage category 3
	Protective separation: Voltage category 2
Contact protection	6,3A brisk or 4A inert DIN VDE 0660 part 200
Voltage on S11	24V DC
Delay on deenergisation K1	< 30 ms
Mechanical data	
Enclosure material	Polyamide PA 6.6
Dimensions (W x H x D)	22,5 x 114,5 x 99
Mounting	Click-fastening for DIN-Rail
Environmental data	
Operating temperature range	-25°C ... +55°C
Degree of protection, terminals	IP 20 DIN VDE 0470 part 1
Degree of protection, enclosure	IP 40 DIN VDE 0470 part 1
Shock resistance	5g, 33 Hz VDE 0160
CE - Conformity	
	CE
Approvals	
	TÜV
	UL
	C-UL

This document will not become the contractual basis; the details included herein do not constitute any descriptions of expected conditions, so that warranties/claims for defects on account of possible variations of the actual qualities from the qualities described herein are explicitly excluded. All rights reserved. Specifications subject to change without notice!

Date of issue: 13.07.2010 / Page 2 of 2
 Document: 6075111020_en.doc / Status: 1 / 2487-10