

STANDARDMATIC



- Axial fans to extract air directly outside or through short ducting;
- Optional window kit for window application;
- Slow and quiet motion of shutter;
- Optional locking ring (Ø10 and 12 models) for panel mounting;
- Double insulated product, without ground wire for fast connection;
- For ducts Ø100-125-150mm;
- Base, Timer model options;
- IPX4 protected (EN 60529);
- In accordance with Standard EN 60335-2-80.

Accessories pages 50, 53, 54.

CE IPX4 T45 Except Standardmatic 15-15T

FURTHER INFORMATION

- Timer version: Turn-off delay adjustable from 2 to 25 minutes;
- Careful selection of materials: grille in white ABS and body in polystyrene.



Wall mounting



Ceiling mounting




Window mounting

TECHNICAL DATA


Model	Code	Hole Ø mm	Supply voltage at 50 Hz	Max flow rate m³/h	Max press. mm H ₂ O	Max press. Pa	Rated Power W	dB(A) _{3m}	Kg
STANDARDMATIC 10	0016600	100	220-240	90	2,6	26	16	32	0,7
STANDARDMATIC 10 T	0016700	100	220-240	90	2,6	26	16	32	0,7
STANDARDMATIC 12	0016800	120	220-240	130	3,0	29	16	33	0,85
STANDARDMATIC 12 T	0016900	120	220-240	130	3,0	29	16	33	0,85
STANDARDMATIC 15	0017000	150	220-240	230	4,2	41	30	41	1,2
STANDARDMATIC 15 T	0017100	150	220-240	230	4,2	41	30	41	1,2

- StandardMatic 10
- StandardMatic 12

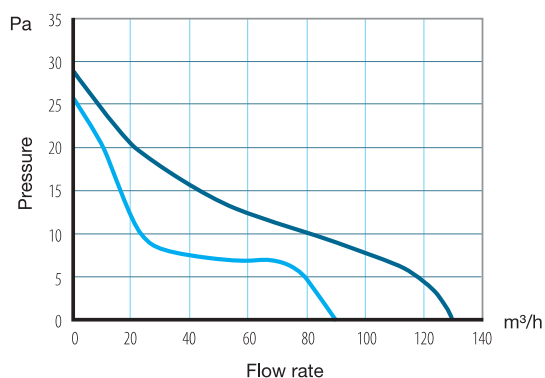


Slow and quiet motion of shutter

- StandardMatic 15

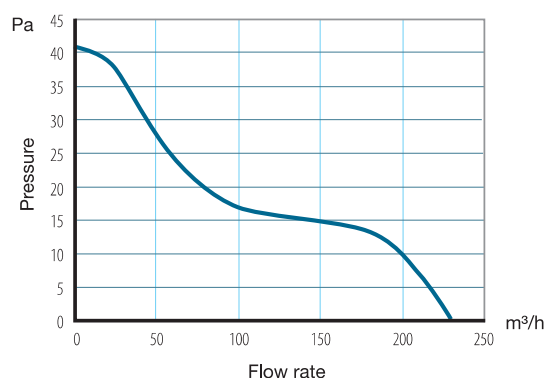

DIMENSIONS

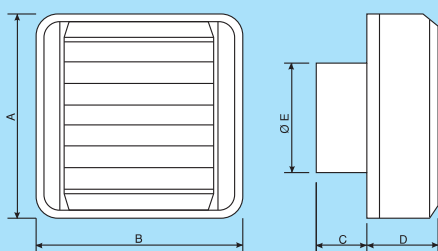

Model	A	B	C	D	E
Standardmatic 10/10T	154	154	45	51	ø98
Standardmatic 12/12T	174	174	45	51	ø118
Standardmatic 15/15T	210	210	62	54	ø146