





PN2



	PN2 140	PN2 250	PN2 500
Portata max. Flow rate max.	230 l/min. 61 gpm	230 l/min. 61 gpm	230 l/min. 61 gpm
Pressione max. Pressure max.	140 bar 2030 psi	250 bar 3626 psi	500 bar 7250 psi
Temp. max. - Temp. max.	60 °C - 140 °F	60 °C - 140 °F	60 °C - 140 °F
Peso - Weight	16 kg - 35,2 lbs	16 kg - 35,2 lbs	16 kg - 35,2 lbs




Per pompe  
For pumps  
**KE - KT - KF**  
**KS - MW**

PN4




	PN4 200	PN4 300	PN4 450
Portata max. Flow rate max.	500 l/min. 132 gpm	390 l/min. 103 gpm	260 l/min. 69 gpm
Pressione max. Pressure max.	200 bar 2900 psi	300 bar 4350 psi	450 bar 6530 psi
Temp. max. - Temp. max.	60 °C - 140 °F	60 °C - 140 °F	60 °C - 140 °F
Peso - Weight	16 kg - 35 lbs	16 kg - 35 lbs	16 kg - 35 lbs

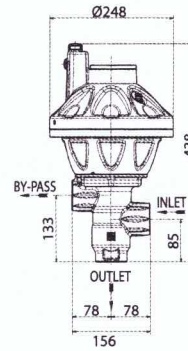


Per pompe  
For pumps  
**MW - MK**  
**MKS - LK**

PNR2



Portata max. - Flow rate max.	230 l/min. 61 gpm
Pressione max. Pressure max.	210 bar 21 MPa 3045 psi
Temp. max. - Temp. max.	85 °C - 185 °F
Peso - Weight	4,7 kg - 10,3 lbs




Per pompe - For pumps  
**KT - KF - KS**

PNRA2



Portata max. - Flow rate max.	230 l/min. 61 gpm
Pressione max. Pressure max.	210 bar 21 MPa 3045 psi
Temp. max. - Temp. max.	85 °C - 185 °F
Peso - Weight	5 kg - 11 lbs



Per pompe - For pumps  
**KT - KF - KS**