

100V-240V AC



Approval Marks



Certified

EN 61047:1992+A1:1996
 EN 61347-1:2001
 EN 61347-2-2:2001

Electronic

Parameter	Conditions	Min	Nom	Max	Unit
I/P Voltage Range		90	230	264	Vac
Input Frequency		47	50-60	63	Hz
Output Power(Pout)	Regular LED	0	-	20	W
Input Current(Iin)	25°C,Nominal Input@230VAC	-	110	-	mA
Output Voltage(Vout)		11.88	12	12.12	Vdc
Output Current(Iout)	25°C,Nominal Input	0	-	1.67	mA
Power Factor	Full Load	-	0.95	-	
Protection	Overload Protection				
	Short Circuit Protection				
	Over Heat Protection				
Ambient Temp.		-20	-	+50	°C
Case Temp. (Tc)	Normal Conditions		-	+70	°C


Lamp Type Regular LED 0.04~0.1W

Application Space

Indoor Use
 (Low Humidity, No Condensation)

Physical

Parameter

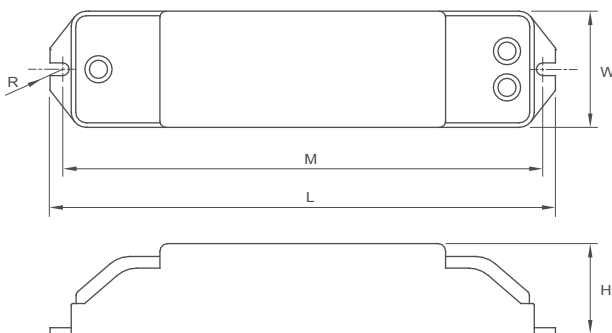


L : 167 mm H : 29.3 mm
 M : 158.6 mm K :
 N : R : 2.1 mm
 W : 38.4 mm Slot On One Side Allowing Alignment : M+/-3 mm

Tolerance : $\geq 0 \sim 100 \geq \pm 0.5\text{mm}$
 $100 \geq \pm 1 \text{ mm}$

Terminal Block : Screws Type
 Housing Material : Polycarbonate
 Soldering : Lead-Free, Comply With RoHS
 Label : Surface Print

Wiring Diagram

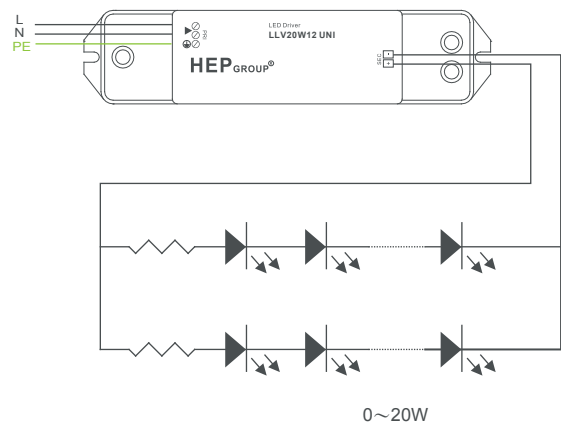

0~20W