




Hydraulic swing clamps are particularly designed for applications which require high clamping forces and easy loading of workpieces in confined spaces.

Standard version

Double acting swing clamps


Cylinder with helical pivoting. The cylinder swing around 90° with swivel stroke and continue to the vertical clamping stroke. Complete stroke = swivel stroke + clamping stroke. Available in block-, screw-in-, top flange- and base flange version.

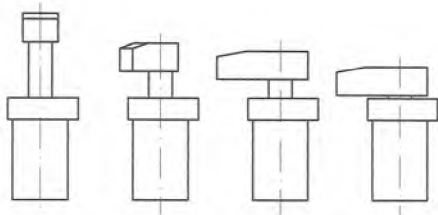

Compact version

Double acting swing clamps

Cylinder with rotation in a plane. The cylinder swing around 90° without stroke movement, continue to the vertical clamping stroke. Complete stroke = clamping stroke. Available in top flange-, base flange- and block version



	model no.		Pressure range		stroke [mm]	Clamping force	
	swivel right	swivel left	min [bar]	max [bar]		min [kN]	max [kN]
	screw-in version standard						
	726D25221-2	727D25221-2	100	250	10	1,9	4,8
	726D32321-2	727D32321-2	100	250	11	3,4	8,5
	block-version standard						
	726D25222-2	727D25222-2	100	250	10	1,9	4,8
	726D32322-2	727D32322-2	100	250	11	3,4	8,5
	bottom-flange-version standard						
	726D40341-2	727D40341-2	100	250	12	5	12,5
	726D40342-2	727D40342-2	100	250	12	5	12,5
	top-flange-version standard						
	726D32243-2	727D32243-2	30	250	12	1	8
	726D32373-2	727D32373-2	30	250	25	1	8
	726D50293-2	727D50293-2	30	250	15	1,9	16
	block-version compact						
	726D50393-2	727D50393-2	30	250	25	1,9	16
	726D32244-2	727D32244-2	30	250	12	1	8
	726D32374-2	727D32374-2	30	250	25	1	8
	top-flange-version compact						
	726D50294-2	727D50294-2	30	250	15	1,9	16
	726D50394-2	727D50394-2	30	250	25	1,9	16
	726D25082-5	727D25082-5	30	250	8	0,5	4
	base-flange-version compact						
	726D32122-5	727D32122-5	30	250	12	1,0	8
	726D50162-5	727D50162-5	30	250	16	1,9	16
	726D63242-5	727D63242-5	30	250	24	2,9	24
	top-flange-version compact						
	726D25083-5	727D25083-5	30	250	8	0,5	4
	726D32123-5	727D32123-5	30	250	12	1,0	8
	726D50163-5	727D50163-5	30	250	16	1,9	16
	top-flange-version compact						
	726D63243-5	727D63243-5	30	250	24	2,9	24
	726D25084-5	727D25084-5	30	250	8	0,5	4
	726D32124-5	727D32124-5	30	250	12	1,0	8
	top-flange-version compact						
	726D50164-5	727D50164-5	30	250	16	1,9	16
	726D63244-5	727D63244-5	30	250	24	2,9	24
	726D50164-5	727D50164-5	30	250	24	2,9	24