

CEM-C10

Single-phase electrical energy meter, assembly on DIN rail



Description

Single-phase electrical energy meter, up to 65 A. Built-in LCD display (7 digits) with rotating screen system. Features an optical communication port (**OSC** system) on the side of the unit for installing the communication module (**CEM-M**). Also features 2 buttons (1 sealable button) for viewing all the measured information.

Other features include:

- **MID** certification, module B+D (depending on the type)
- Class 1 active energy (Class B, in accordance with **MID**), Class 2 reactive energy
- Complies with the **EN 50470** (MID European standards) or **IEC 62052-11** standards (international standards), depending on the type.
- Compact size (2 modules, 36 mm)
- Resettable partial meter
- 1 programmable impulse output, in accordance with **DIN 43864**
- Indicates bad connections on the screen
- Energy storage, even in the case of bad connections


Applications

- Measurement of electrical consumption in buildings, rooms or machinery.
- Control of consumption during a determined period.
- Energy consumption report sent to a remote system (PLC/BMS).
- Display of electrical parameters (V, A, kW, kW-h, PF, etc.)

Technical features

Power circuit	Rated voltage	230 Vac / 127 Vac, depending on the model
	Tolerance	± 20%
	Frequency	50...60 Hz
	Consumption	< 2 W / 10 VA
Voltage measurement circuit	Connection	Single-phase
	Reference voltage	230 Vac / 127 Vac, depending on the model
	Frequency	50 / 60 Hz
Current measurement circuit	Self-consumption	< 2 W / 10 VA
	Nominal current I_n	5 A
	Maximum current	65 A
Accuracy	Self-consumption	< 0.1% of I_n
	Active Energy	Class B (EN 50470) Class 1 (IEC 62053-21)
Impulse output	Reactive Energy	Class 2.0 (IEC 62053-23)
	Type	Optocoupled
Environmental features	Electrical features	max. 24 Vdc 50 mA
	Operating temperature	-25 °C...+70 °C
Mechanical features	Relative humidity	5%...95% without condensation
	Protection degree	IP 51 installation / IP 40 terminals
	Dimensions	35 x 90 x 61 mm
	Weight	140 g
	Material	ABS + V0 self-extinguishing polycarbonate
Standards	EN 50470-1, EN 50470-3, IEC 62052-11, IEC 62053-21, IEC 62053-23	

OSC

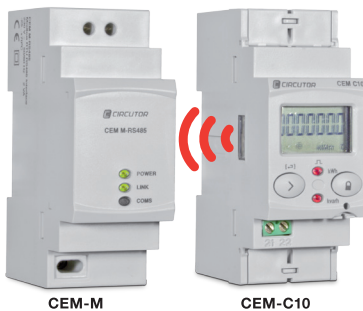

CEM-M

CEM-C10




CEM-C10

Single-phase electrical energy meter, assembly on DIN rail

References

Type	Code	Measured parameters	Active	Reactive	MID certification
CEM-C10-212	Q21112	V, A, kW, kWh, kvar, kvarh, PF	•	•	-
CEM-C10-212 MID	Q21114	V, A, kW, kWh, kvar, kvarh, PF	•	•	•

Dimensions

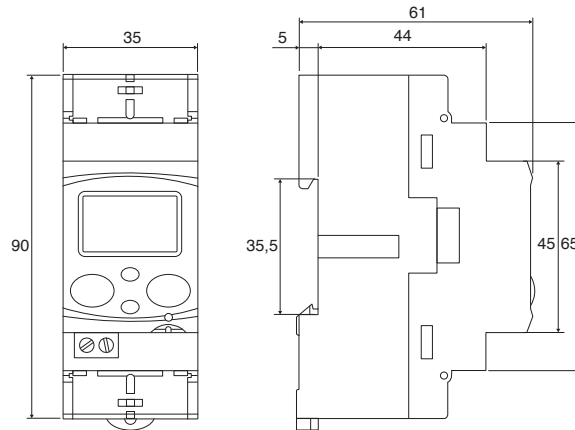

Connections

