

CURVEX STAINLESS INSULATION BOX (300°C 140MM HEIGHT)

CX2005

DATASHEET

PRODUCT DESCRIPTION

A high quality insulation box with outer shield of high-grade stainless steel. The high-grade stainless steel inner box is shielded with a carefully formulated mixture of insulation material, which makes the combination suitable to resist high temperatures for long time.

**FEATURES**

- Excellent logger protection against oven heat
 - Ferro plate for holding the magnet probes when not in use
- Mounted cable hook allows the storage of surplus cable length


ORDERING INFORMATION

CX2005 CurveX stainless insulation box (300°C 140 mm height)


ACCESSORIES

CX2011 Heat sink LDPE for insulation box CX2002, CX2017 and CX2005

CX3050 Insulation box logger bracket

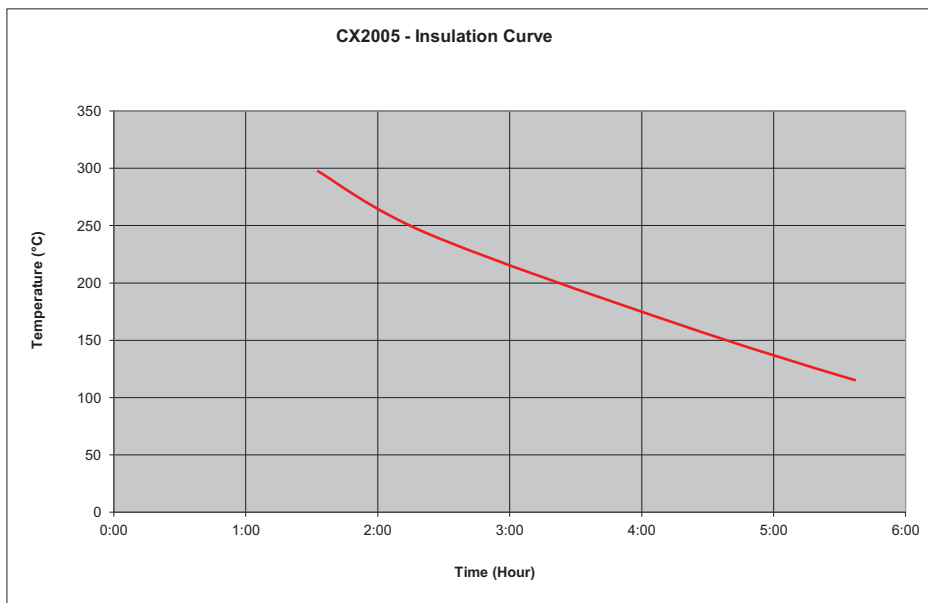SPECIFICATIONS

Tested in combination with the energy absorber CX2011 (a high density energy-collecting media) with a start temperature of 20°C (68°F).

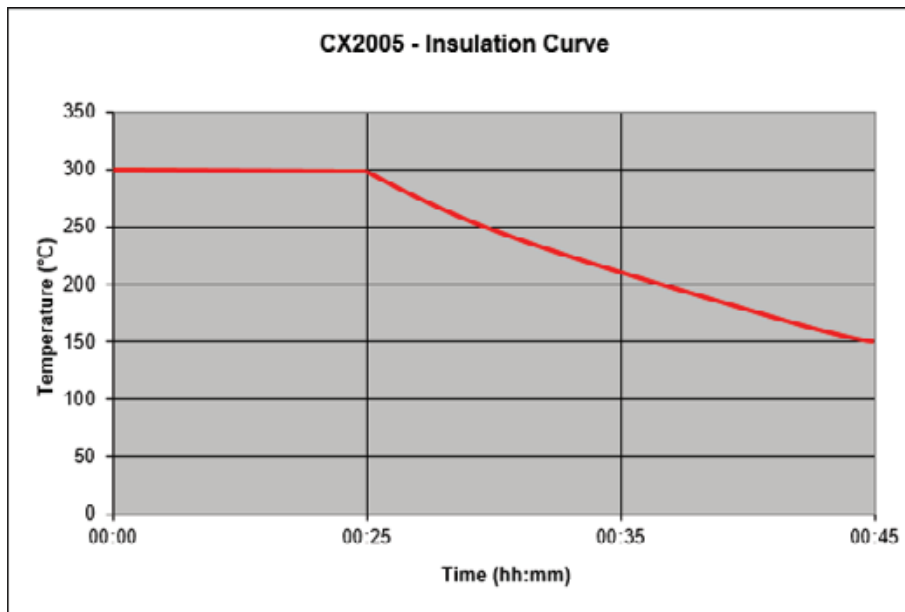

Tested in combination with logger bracket CX3050 with a start temperature of 20°C (68°F).

SPECIAL CARE

- Though robust in design, this instrument is precision-machined. Never drop it or knock it over
- Always clean the instrument after use.
- Clean the instrument using a soft dry cloth. Never clean the instrument by any mechanical means such as a wire brush or abrasive paper. This may cause, just like the use of aggressive cleaning agents, permanent damage.
- Always keep the instrument in its case when not in use.
- We recommend annual calibration

SAFETY PRECAUTIONS

- Wear insulated gloves when handling the insulation box CX2005.
- Do not exceed the specified time at temperature limits in order to protect the equipment.
- Do not overheat, crush, puncture, or otherwise damage the energy absorber CX2011, this may result in leakage or explosion.

DISCLAIMER

The right of technical modifications is reserved.

The information given in this sheet is not intended to be exhaustive and any person using the product for any purpose other than that specifically recommended in this sheet without first obtaining written confirmation from us as to the suitability of the product for the intended purpose does so at his own risk. Whilst we endeavour to ensure that all advice we give about the product (whether in this sheet or otherwise) is correct we have no control over either the quality or condition of the product or the many factors affecting the use and application of the product. Therefore, unless we specifically agree in writing to do so, we do not accept any liability whatsoever or howsoever arising for the performance of the product or for any loss or damage (other than death or personal injury resulting from our negligence) arising out of the use of the product. The information contained in this sheet is liable to modification from time to time in the light of experience and our policy of continuous product development.