

# SC-SR-BC




<b>Ausführung</b> construction	Wellrohrhalter tube clamp	
<b>Werkstoff</b> material	Polyamid 6, UL94 V0 polyamide 6, UL94 V0	
<b>Temperatur</b> temperature	-40°C - +105°C	
<b>Schutzart</b> protection	-	
<b>gemäß</b> according to	-	
<b>Passende Wellrohre</b> suitable corrugated conduits	alle all	



SR-Montageschiene für Halter SC  
SR-mounting rail for clamp SC




Art. Nr. grau art. no. grey	Art. Nr. schwarz art. no. black	NW DN	A mm	D mm	H mm	L mm	VPE Stk. unit pcs.
GSC07	BSC07	7	17,0	13,1	21,8	40	100
GSC10	BSC10	10	21,0	15,0	25,7	48	100
GSC12	BSC12	12	24,0	16,4	28,6	54	100
GSC17	BSC17	17	30,0	19,7	34,9	68	100
GSC23	BSC23	23	38,0	23,3	42,5	84	100
GSC29	BSC29	29	45,0	26,4	49,0	98	50
GSC36	BSC36	36	55,0	30,2	58,0	118	50
GSC48	BSC48	48	67,5	36,3	70,3	143	30



Art. Nr. grau art. no. grey	NW DN	L mm	VPE Stk. unit pcs.
SR	7 - 48	275	10

Art. Nr. grau art. no. grey	VPE Stk. unit pcs.
LK	20

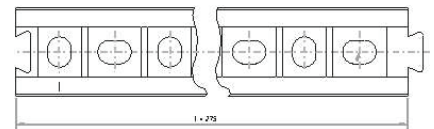

Art. Nr. grau art. no. grey	Art. Nr. schwarz art. no. black	NW DN	A mm	D mm	H mm	L mm	VPE Stk. unit pcs.
GBC17	BBC17	17	37,5	27,0	35,0	71,8	100
GBC23	BBC23	23	38	28,5	42,5	84,0	50
GBC29	BBC29	29	45	29,5	49,0	98,5	50
GBC36	BBC36	36	55	49,5	58,0	118,0	30
GBC48	BBC48	48	67,5	49,5	70,0	143,0	30

