


CMP-63-E1FU Art. No. 243492



- Ex d and Ex e cable entry for all armoured cables: SWA, braid- and tape-type steel or aluminium armouring
- Explosion-protected displacement seal for the outer cable sheath, controlled outer load retention seal
- Worldwide certification in accordance with IECEx, ATEX and cCSAus, EMC-tested

WebCode **E1FUA**

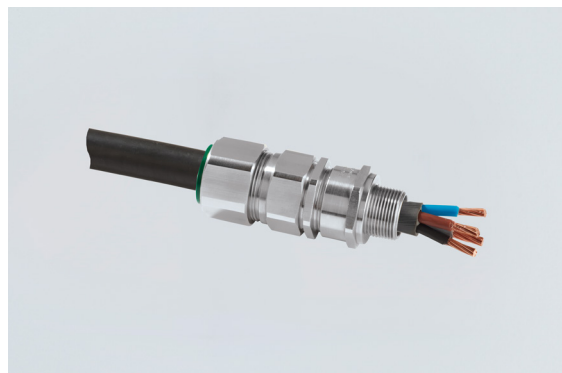

E1FU series metal Ex d and Ex e cable entries are suitable for all types of armoured cables, i.e. for SWA, braid- and tape-type steel and aluminium armouring. They feature a multi-functional holder for the armouring and various seals. They are also designed to prevent cold flow and are EMC-tested.

Technical Data

Explosion Protection

Application range (zones)	1 2 20 21 22
IECEX gas certificate	IECEX CML 18.0181X
ATEX gas certificate	CML 18ATEX1324X
IECEX dust certificate	IECEX CML 18.0181X
ATEX dust certificate	CML 18ATEX1324X
IECEX firedamp certificate	IECEX SIM 14.0007 X
ATEX firedamp certificate	CML 18ATEX1324X
IECEX restricted breathing certificate	IECEX CML 18.0181X
ATEX restricted breathing certificate	CML 18ATEX4316X
Certificate EAC	TS RU S-GB.AA87.B.00487
Ambient temperature °C	-60 ... +130 °C
Gas explosion protection IECEx	Ex d IIC Gb
Gas explosion protection ATEX	⊕ II 2 G Ex d IIC Gb
Gas explosion protection EAC	⊠ 1 Ex d e IIC Gb X ⊠ 2 Ex nR IIC Gc X
Dust explosion protection IECEx	Ex ta IIIC Da
Dust explosion protection ATEX	⊕ II 1 D Ex ta IIIC Da
Dust explosion protection EAC	⊠ Ex ta IIIC Da X
Firedamp protection IECEx	Ex d I Mb
Firedamp protection ATEX	⊕ I M2 Ex d I Mb
Restricted breathing IECEx	Ex nR IIC Gc
Restricted breathing ATEX	⊕ II 3 G Ex nR IIC Gc
Gas explosion protection IECEx 2	Ex e IIC Gb

Explosion Protection

Gas explosion protection ATEX 2	⊕ II 2 G Ex e IIC Gb
Firedamp protection IECEx 2	Ex e I Mb
Firedamp protection ATEX 2	⊕ I M2 Ex e I Mb
Note	The product certification and certificates can be downloaded from the manufacturer's homepage (www.cmp-products.com)

Electrical Data

Ex version	Ex e & Ex d & Ex nR & Ex ta
------------	-----------------------------

Ambient Conditions


Ambient temperature	-60 °C ... +130 °C
---------------------	--------------------

Mechanical Data

Degree of protection (IP)	IP66
Degree of protection note	IP67 and IP68 mounting in accordance with the specifications of the manufacturer, CMP
Sealing material	SOLO LSF
Material	Nickel-plated brass
Silicone-free	Yes
Clamping range	54.6 – 65.8 mm
Clamping range max.	65.8 mm
Clamping range min.	54.6 mm
Armouring type	All armouring
Armouring type 2	Without lead sheath
Armouring type 3	With double seal
Construction type	BS 6121, IEC/EN 62444
Width across corners	88 mm
Width across flats	80 mm
Thread size	M63
Thread length	15 mm
Thread pitch	1,5
Thread standard	metric
Gland size	63
Grooved cone	0.6 ... 1.6 mm
Stepped cone	2 ... 2.5 mm
Inner sheath	47.2 ... 55.9 mm
Outer sheath	54.6 ... 65.8 mm
Protrusion length	104 mm
PVC-shroud	PVC25
Lot size	1
Material note	(other materials available on request)
Weight	1.34 kg

CMP-63-E1FU Art. No. 243492

Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations

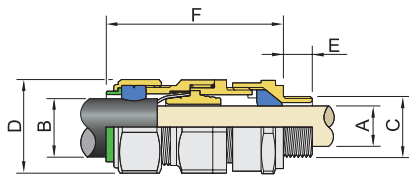

- A = Inner sheath
- B = Outer sheath
- C = Thread size
- D = Width across corners
- D = Width across flats
- E = Thread length
- F = Protrusion length

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.