


Chains & sprockets	Wear strips	Side guide brackets & accessories	Levelers	Engineering manual
Modular belts & sprockets	Chain & belt return systems	Frame & structure supports	Bearing supports	
Curves & tracks	Side guide solutions	Miscellaneous products	Equipment	

10110a

GENERAL INDEX


www.SystemPlastSmartGuide.com




Wear strips
50510a




Miscellaneous products
54510a




Curves & tracks
50005a




Frame & structure supports
54010a




Side guide brackets & accessories
53510a




Side guide solutions
51510a



Roller guide solutions
52510a

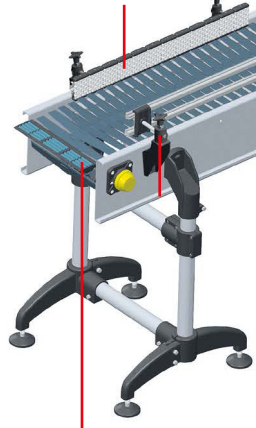

Roller transfer modules
52670a



Chains & belts return system
51010a




Levelers
55510a




Bearings
56010a



Equipment
57010a



Chains & sprockets
11010a




Modular belts & sprockets
30010a

Chains & sprockets	Wear strips	Side guide brackets & accessories	Levelers	Engineering manual
Modular belts & sprockets	Chain & belt return systems	Frame & structure supports	Bearing supports	
Curves & tracks	Side guide solutions	Miscellaneous products	Equipment	

11070a


www.SystemPlastSmartGuide.com

881R TAB - 8810 TAB SIDEFLEXING CHAINS FOR TAB SYSTEM

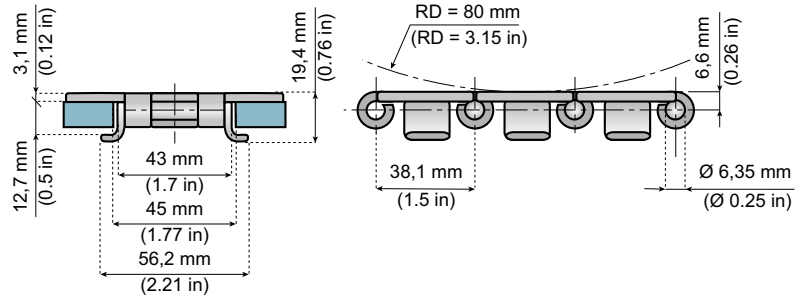

8810 TAB
Optimized hinge shape

881R TAB

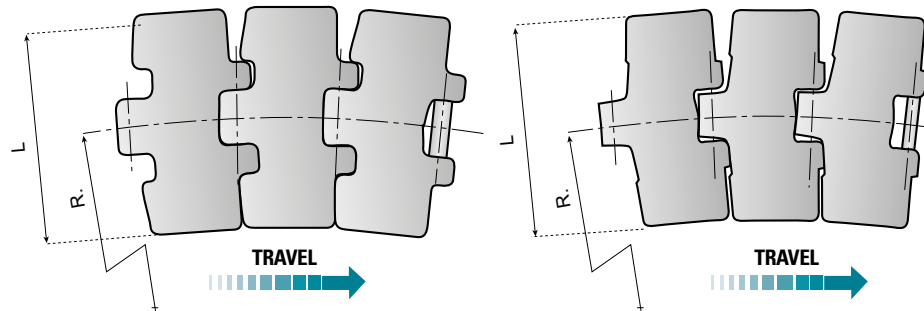

ITEM DESCRIPTION	MATERIAL	MAX. WORKING LOAD		FINISH µm	WIDTH L		R MIN.		WEIGHT	
		N	lbs		mm	in	mm	in	Kg/m	lbs/ft.
SS881OTAB-K325	STANDARD	4400	990	0,6	82,5	3 ¼	500	19.7	3,0	2.0
SS881OTAB-K450					114,3	4 ½			3,0	2.0
SSE881RTAB-K325	EXTRA	4850	1090	0,6	82,5	3 ¼	200	7.9	3,0	2.0
SSE881OTAB-K325	Extra plus	6000	1350	0,3	82,5	3 ¼	500	19.7	3,0	2.0
SSE881OTAB-K450					114,3	4 ½			3,7	2.5
SSE881OTAB-K750					190,5	7 ½			5,5	3.7
SSE881OTAB-K325HB	Extra plus HB				82,5	3 ¼			3,0	2.0
SSA881OTAB-K325	Austenitic	4500	3020	0,3	82,5	3 ¼	500	19.7	3,00	2.0
SSA881OTAB-K450					114,3	4 ½			3,70	2.5
SSA881OTAB-K750 ^{MOQ}					190,5	7 ½			5,50	3.7

Standard length: 80 pitches (10 ft. - 3,05 m)

Breaking load according to standard ISO 4348 - DIN 8153

MOQ Min. order quantity: 30 m.

Other versions 881TAB:

VG
Rubber top



Information about this product is only available on our Smart Guide® website.



11090a



50110a