


Tipo : Type :	<b>D7/C</b>		do: 7 mm
Omologazione Homologation	PN	Coefficiente efflusso ridotto Low flow coefficient	Campo di taratura Setting range
E.D. 2014/68/EU - IV Cat.(PED)	60	0,85	0,3 - 60,0 bar
EAC	60	0,85	0,3 - 60,0 bar
ATEX Ex h II 2 Gb	60	0,85	0,3 - 60,0 bar
ATEX Ex h II 2 Db	60	0,85	0,3 - 60,0 bar
ASME VIII Div.1	60	0,629	1,0 - 60,0 bar
Canadian Reg. CRN	60	0,629	1,0 - 60,0 bar

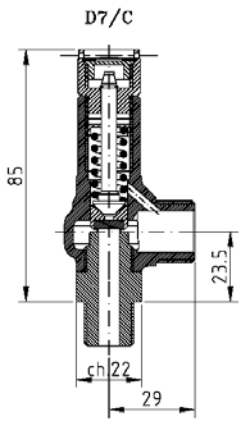


kg. 0,25

### CONFIGURAZIONE - CONFIGURATION

Materiale Material	Ottone Brass	Mista Ottone-Acciaio inox Mixed Brass-Stainless steel	Acciaio inox Stainless steel
Modelli Model	Con ghiera With ring nut	Con ghiera With ring nut	Con ghiera With ring nut
	Senza Ghiera Without ring nut	Senza Ghiera Without ring nut	Senza Ghiera Without ring nut
	/	/	/
	/	/	/
	/	/	/
Sedi di Tenuta Seal System	N.B.R. (Std) -10 / + 100 °C	N.B.R. (Std) -10 / + 100 °C	N.B.R. (Std) -10 / + 100 °C
	E.P.D.M. -50 / + 150 °C	E.P.D.M. -50 / + 150 °C	E.P.D.M. -50 / + 150 °C
	VITON -20 / +200 °C	VITON -20 / +200 °C	VITON -20 / +200 °C
	SILICONE -60 / +200 °C	SILICONE -60 / +200 °C	SILICONE -60 / +200 °C
	PTFE -196 / +250 °C	PTFE -196 / +250 °C	PTFE -196 / +250 °C
	KALREZ -20 / +250 °C	KALREZ -20 / +250 °C	KALREZ -20 / +275 °C
	/	/	/
Connessione Entrata Inlet Connection	G.1/4" - 3/8" ISO228	G.1/4" - 3/8" ISO228	G.1/4" - 3/8" ISO228
	G.3/8" ISO228 F.	G.3/8" ISO228 F.	G.3/8" ISO228 F.
	R.1/4" - 3/8" EN10226	R.1/4" - 3/8" EN10226	R.1/4" - 3/8" EN10226
	1/4" - 3/8" NPT	1/4" - 3/8" NPT	1/4" - 3/8" NPT
	/	3/4" Tri Clamp	3/4" Tri Clamp
	/	/	/
Connessione Uscita Outlet Connection	G.1/2" ISO228	G.1/2" ISO228	G.1/2" ISO228
	/	/	/
	/	/	/
	/	/	/
	/	/	/
	/	/	/

A richiesta possono essere eseguiti collaudi dai più prestigiosi enti quali: INAIL (area ISPESL), TÜV, RINA, Bureau Veritas, ABS e Lloyd Register.  
On request tests can be made by the most prestigious societies, such as: INAIL (area ISPESL), TÜV, RINA, Bureau Veritas, ABS and Lloyd Register.

#### Note:

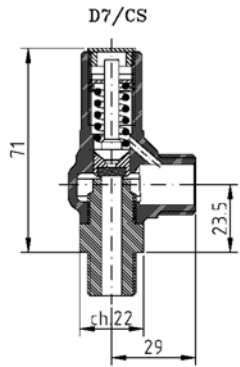

kg. 0,22