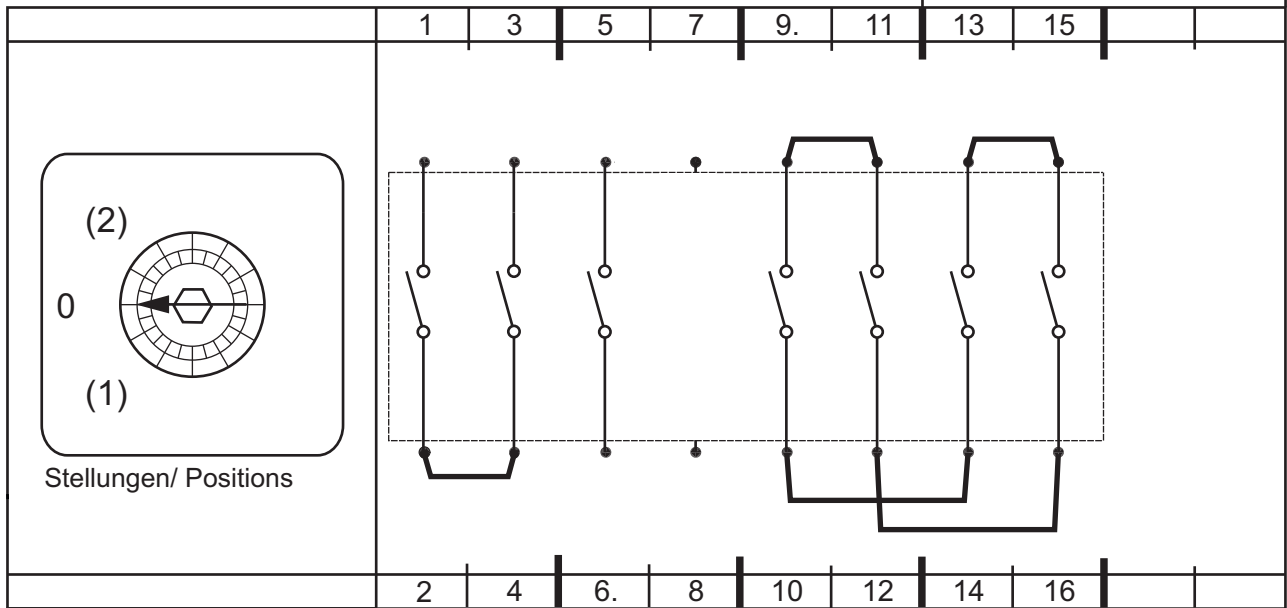


Index: 3

**P220-I-8450**


|  |      |      |  |  |  |  |  |  |  |
|--|------|------|--|--|--|--|--|--|--|
|  | (1)  | 0°   |  |  |  |  |  |  |  |
|  |      | 15°  |  |  |  |  |  |  |  |
|  |      | 30°  |  |  |  |  |  |  |  |
|  | 0    | 45°  |  |  |  |  |  |  |  |
|  |      | 60°  |  |  |  |  |  |  |  |
|  |      | 75°  |  |  |  |  |  |  |  |
|  | (2)  | 90°  |  |  |  |  |  |  |  |
|  |      | 105° |  |  |  |  |  |  |  |
|  |      | 120° |  |  |  |  |  |  |  |
|  |      | 135° |  |  |  |  |  |  |  |
|  |      | 150° |  |  |  |  |  |  |  |
|  |      | 165° |  |  |  |  |  |  |  |
|  |      | 180° |  |  |  |  |  |  |  |
|  |      | 195° |  |  |  |  |  |  |  |
|  |      | 210° |  |  |  |  |  |  |  |
|  |      | 225° |  |  |  |  |  |  |  |
|  |      | 240° |  |  |  |  |  |  |  |
|  |      | 255° |  |  |  |  |  |  |  |
|  |      | 270° |  |  |  |  |  |  |  |
|  |      | 285° |  |  |  |  |  |  |  |
|  | 300° |      |  |  |  |  |  |  |  |
|  | 315° |      |  |  |  |  |  |  |  |
|  | 330° |      |  |  |  |  |  |  |  |
|  | 345° |      |  |  |  |  |  |  |  |

|                                    |               |                                       |   |  |
|------------------------------------|---------------|---------------------------------------|---|--|
| Bauform/<br>Mounting form:         | 036F4         | Grundscharter/<br>Basic switch:       | Zubehör/ Optional extras:                                   |  |
| Bauformmodul/<br>Mtg. form module: | BFB2-013      | P220-I-8450-A01                       | *F-padlock device yellow/ red - padlockable in position "0" |  |
| Antriebsmodul/<br>Operator:        | 417040-4D322* | Anschlag/ Stop:                       |   |  |
| Schrifteinlage/<br>Legend plate:   | 418036-4D322  | Rundschtaltung/<br>Complete rotation: | <input type="checkbox"/>                                    |  |
|                                    |               | Datum/ Date                           | 14.09.2018  |  |