



Coating must not have detectable traces of silicone.

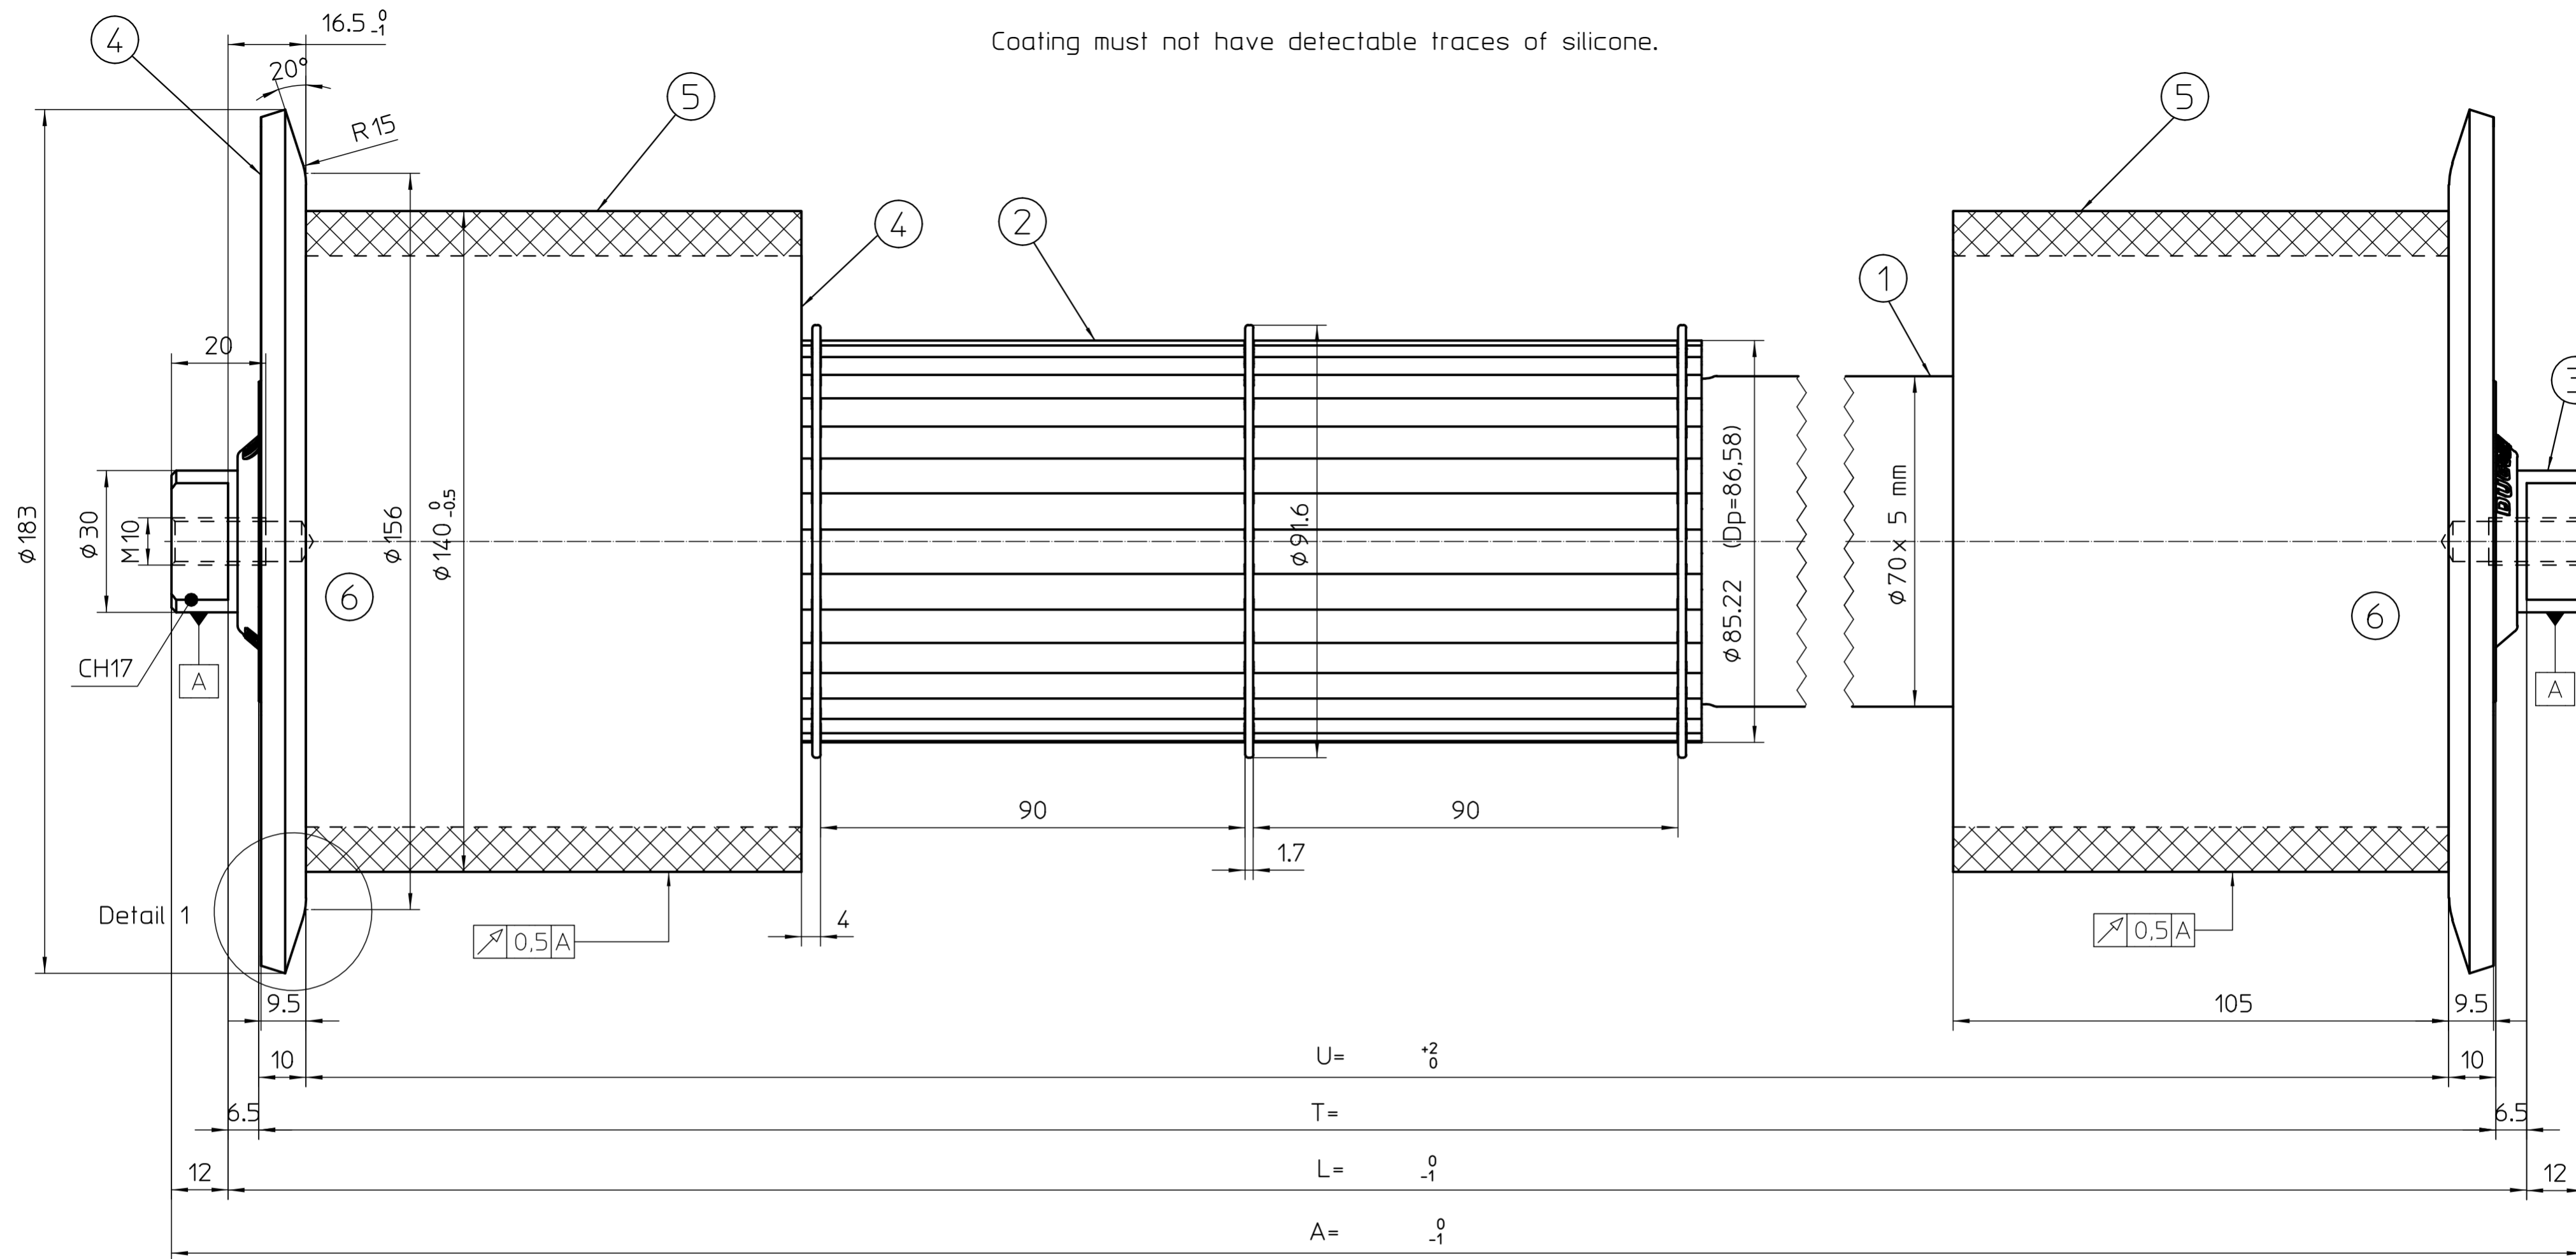


1	Tube dia. 70x5 mm EN 10025-S235 or similar/higher.
2	Pulley Z34 HTD 8M-85 Dp=86.58 De=85.22 EN10025-S235 JRG2 and snap rings SP85 DIN 5417
3	Axle dia. 30 mm EN 10025-S235 with threaded holes M10x20 mm and milled ends dim. 17x12 mm.
4	Flange dia. 183x6 (hardened) and flange dia. 112x5 mm made by EN 10111 DD11 or similar/higher.
5	Polyurethane coating hardness 95 +/-3 Shore A.
6	Single row rigid radial precision bearings type 6206-2RS lifetime lubrication.

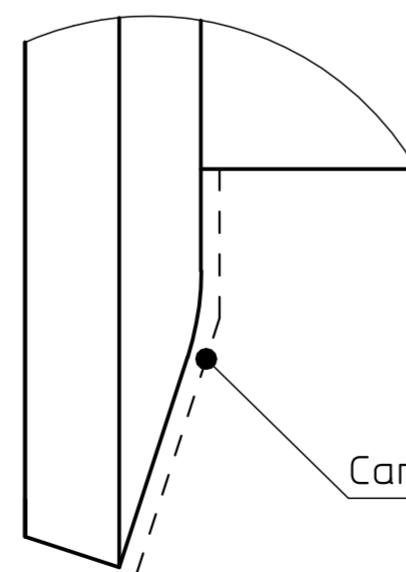

Detail 1  
2.5:1

Carbonitriding HRC 50-63

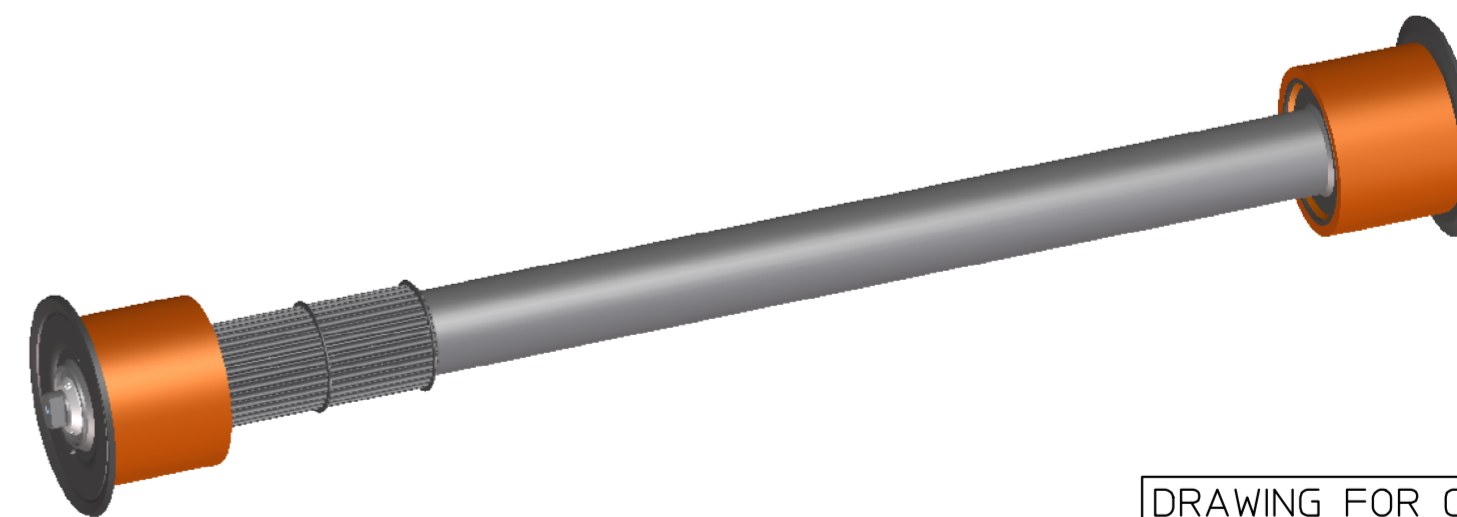

DRAWING FOR CUSTOMER

PATENT NR. US9359145  
PATENT pending n. EP2985245

DESCRIZIONE ULTIMA MODIFICA		ESEGUITA	APPROV.
05	Aggiornamento TY.	Pace	Gamberini
DENOMINAZIONE		TOLLERANZE DIM. E FORMA: T268-01-00 T268-03-00 SALDATURE: T287-01-00	
D140/70/30 Z34 HTD8M-85 DRIVEN ROLLER POLYURETHANE COATED-DE183 HARDENED FLANGES		MODIFICHE	
DIS. Rizza DATA 13/11/14 SCALA 1:1 FORM. A2		DATA	SCHEDA N°
CONTR. Rizza APPROV. Rizza PESO -		00 13/11/14	3466
DIS.N. 329638V		01 05/03/15	3586
SOSTITUISCE -		02 07/06/16	NO
		03 01/09/16	3977
		04 31/01/17	4010
		05 09/06/17	4076