

Pratissoli Plunger Pumps

KS Series - Flows to 226 Lpm - Pressures to 250 Bar

- Flow rates up to 226 Lpm
- Pressures up to 250 Bar
- Nickel plated stainless steel manifold
- Maximum fluid temp 40°C

Bare shaft pump only

Part No.	Bar	Lpm	HP	Rpm	Shaft OD	Inlet	Outlet	Kg
KS28	250	110	72	1200	40mm	2" BSPF	1 1/2" BSPF	78
KS32	200	145	75		40mm	2" BSPF	1 1/2" BSPF	78
KS36	160	183	76		40mm	2" BSPF	1 1/2" BSPF	78
KS40	138	226	81		40mm	2" BSPF	1 1/2" BSPF	78

Dimensions 582L x 367W x 261H mm



KS Series - Flows to 226 Lpm - Pressures to 250 Bar

- Flow rates up to 226 Lpm
- Pressures up to 250 Bar
- Nickel plated stainless steel manifold
- Maximum fluid temp 40°C
- Gearbox can be mounted left or right & 4 positions from horizontal axis

Fitted with gearbox

Part No.	Bar	Lpm	HP	Rpm	Shaft OD	Inlet	Outlet	Kg
KS28-GB15	250	110	72	1500	40mm	2" BSPF	1 1/2" BSPF	95
KS32-GB15	200	145	75		40mm	2" BSPF	1 1/2" BSPF	95
KS36-GB15	160	183	76		40mm	2" BSPF	1 1/2" BSPF	95
KS40-GB15	138	226	81		40mm	2" BSPF	1 1/2" BSPF	95

Dimensions 582L x 483W x 261H mm

KS28-GB18	250	110	72	1800	40mm	2" BSPF	1 1/2" BSPF	95
KS32-GB18	200	145	75		40mm	2" BSPF	1 1/2" BSPF	95
KS36-GB18	160	183	76		40mm	2" BSPF	1 1/2" BSPF	95
KS40-GB18	138	226	81		40mm	2" BSPF	1 1/2" BSPF	95

Dimensions 582L x 483W x 261H mm

KS28-GB22	250	110	72	2200	40mm	2" BSPF	1 1/2" BSPF	95
KS32-GB22	200	145	75		40mm	2" BSPF	1 1/2" BSPF	95
KS36-GB22	160	183	76		40mm	2" BSPF	1 1/2" BSPF	95
KS40-GB22	138	226	81		40mm	2" BSPF	1 1/2" BSPF	95

Dimensions 582L x 483W x 261H mm



MW Series - Flows to 399 Lpm - Pressures to 300 Bar

- Flow rates up to 399 Lpm
- Pressures up to 300 Bar
- Nickel plated stainless steel manifold
- Maximum fluid temp 40°C


Bare shaft pump only

Part No.	Bar	Lpm	HP	Rpm	Shaft OD	Inlet	Outlet	Kg
MW32	300	135	105	800	50mm	2" BSPF	1" BSPF	220
MW36	240	171	107		50mm	2" BSPF	1" BSPF	220
MW40	190	211	104		50mm	2" BSPF	1" BSPF	220

Dimensions 750L x 442W x 359H mm

MW45	155	267	107	800	50mm	66mm Flanged	1 1/4" BSPF	220
MW50	125	330	107		50mm	66mm Flanged	1 1/4" BSPF	220
MW55	100	399	104		50mm	66mm Flanged	1 1/4" BSPF	220

Dimensions 752L x 442W x 359H mm

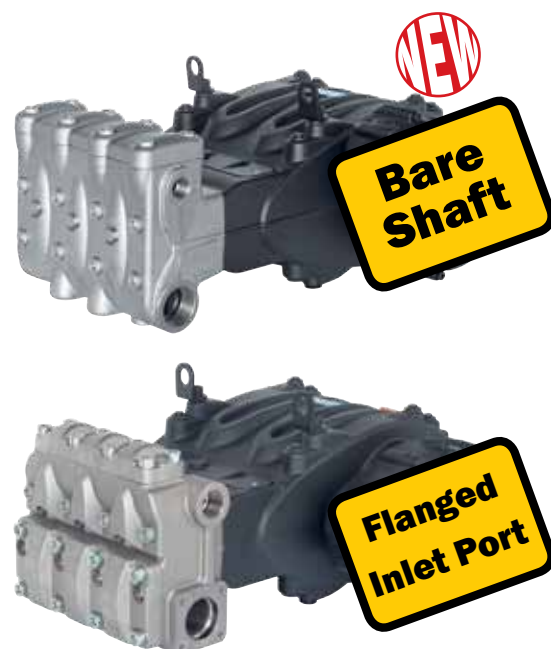

Bare Shaft

Flanged Inlet Port

When operating at temperatures above 40°C certain installation conditions must be observed, please contact our sales office for full details