


TM-2C-140R/HR

Temperature Switch **TM**

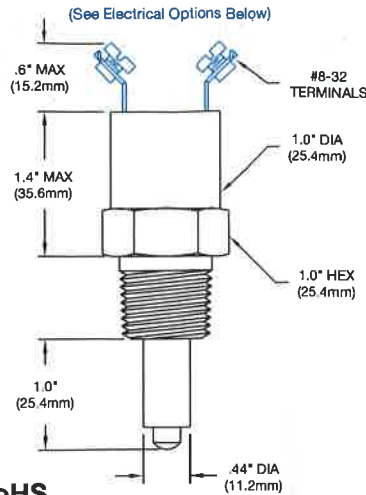

CE RoHS


Features

- Utilizes bellows mechanism to sense temperature
- High-quality snap-action switch
- Factory preset
- Shock and vibration resistant
- Available in a wide range of configurations
- NEMA 4, 13

Operating Specifications

Set Point Range	40° — 300°F	(4° — 149°C)
Set Point Tolerance	±5°F	(2.8°C)
Maximum Operating Temperature	100°F above set point (325°F max)	
Differential	8 — 16°F	
Current Rating	5 A @ 250 VAC	5 A @ 30 VDC (Resistive) :
Media Connection	Standard: Brass (Optional: 303 SS, 316 SS)	
Circuit Form	SPST-NO, SPST-NC or SPDT	
Electrical Connection	See Order Chart Below for Options	
Maximum External Pressure	500 PSI	

How to Order (Example: Part Number: **TM - 6A - 120R / WL**)

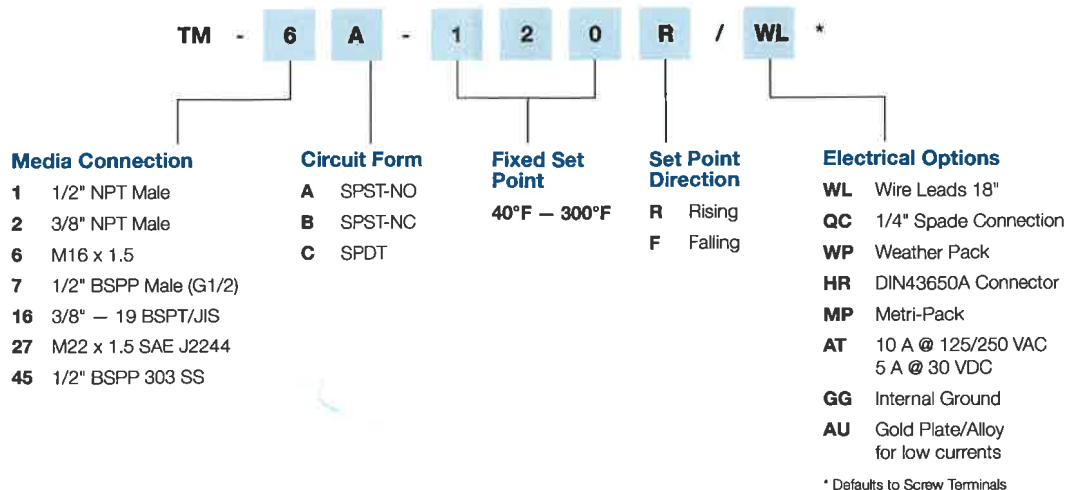

For more **media connections**, see pages 31-32.

For all available **optional configurations**, see page 33.

For more **electrical connections**, see page 7.