


**Range extended!**

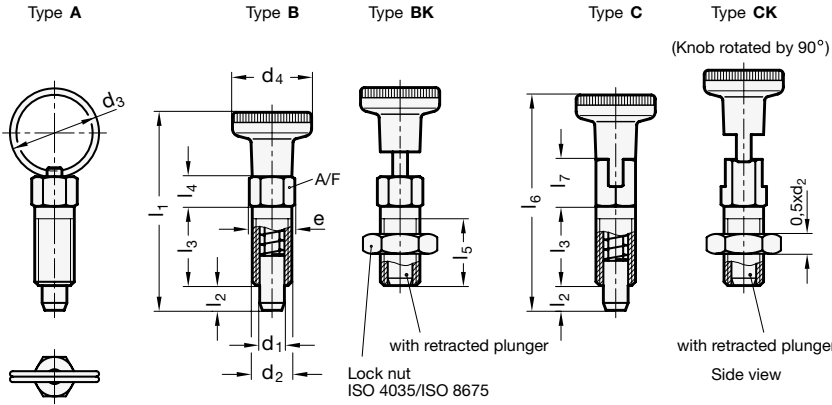

- 3 Type**
- A** without rest position (lifting ring) without lock nut
  - AK** without rest position (lifting ring) with lock nut
  - B** without rest position (Knob), without lock nut
  - BK** without rest position (Knob), with lock nut
  - C** with rest position (Knob), without lock nut
  - CK** with rest position (Knob), with lock nut

**Rost frei** Inox Stainless Steel **Inch** Inch sizes available

**1** **2**

d <sub>1</sub> Pin h11 Bore $+0.03$	d <sub>2</sub>	d <sub>3</sub>	d <sub>4</sub>	e	l <sub>1</sub>	l <sub>2</sub> min.	l <sub>3</sub>	l <sub>4</sub>	l <sub>5</sub> min.	l <sub>6</sub>	l <sub>7</sub>	A/F	max. tightening torque in Nm	Spring load in N ≈	
														initial	end
3	M 6	14	12	6,9	30	3,5	12	4,5	10	32,5	7	6	2	3	12
3	M 6 x 0,75	14	12	6,9	30	3,5	12	4,5	10	32,5	7	6	3	3	12
4	M 6	14	12	6,9	30,5	4	12	4,5	10	33	7	6	2	3	12
4	M 8 x 1	18	16	9,2	39,5	4,5	16	6	13,5	43	9,5	8	8	5	24
5	M 8	18	16	9,2	40	5	16	6	13,5	43,5	9,5	8	7	5	24
5	M 8 x 1	18	16	9,2	40	5	16	6	13,5	43,5	9,5	8	7	5	24
5	M 10 x 1	18	18	11,5	42,5	5	16	6	13,5	46	10	10	22	5	24
6	M 10	24	18	11,5	49	6	20	7,5	17	52	10,5	10	15	5	21
6	M 12 x 1,5	24	21	13,8	52	6	20	7,5	16,5	55	11	12	38	5	21
8	M 12	30	21	13,8	59	8	24	9	20,5	63,5	13,5	12	20	6	22
8	M 12 x 1,5	30	21	13,8	59	8	24	9	20,5	63,5	13,5	12	20	6	22
8	M 16 x 1,5	30	25	19,6	63,5	8	24	9	20,5	68	13,5	17	80	6	22
10	M 16 x 1,5	30	25	19,6	67,5	10	26	9	22,5	72,5	14	17	80	4	27

**Specification**

- Threaded body
  - Steel zinc plated, blue passivated **ST**
  - Stainless Steel AISI 303 **NI**
- Plunger  
Stainless Steel AISI 303
- Spring  
Stainless Steel AISI 301
- Lifting ring  
Stainless Steel AISI 301
- Knob Plastic (Polyamide PA)
  - black, matt
  - not removable
- ISO-Fundamental Tolerances → Page 323
- Stainless Steel characteristics → Page 334
- RoHS compliant

**Information**

Indexing plungers GN 717 are a reasonably priced indexing plunger variant which are distinguished for their small dimensions. Their use should be limited to such applications where high precision indexing is not required.

Due to the comparably small dimensions of indexing plungers GN 717, it is advisable to follow the values listed above regarding maximum tightening torque during assembly.

- Range of indexing plungers → Main Catalogue Page 402/411
- Distance bushings GN 609 / GN 609.5  
(to limit the thread length) → Main Catalogue Page 450

**How to order**

<b>1</b>	d <sub>1</sub>
<b>2</b>	d <sub>2</sub>
<b>3</b>	Type
<b>4</b>	Material

**GN717-8-M12-A-ST**