

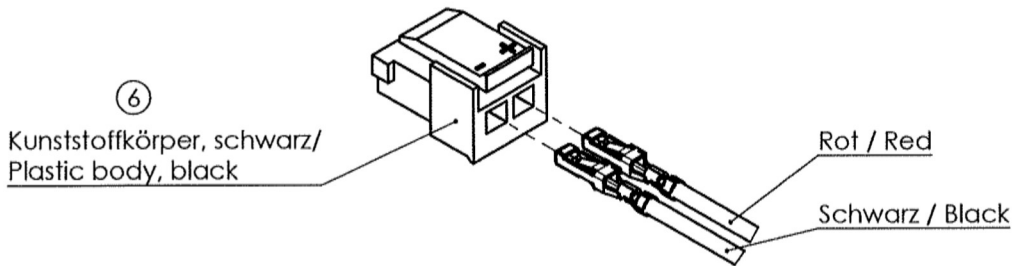


Artikelnummer / article number	Bezeichnung / description	A [mm]
616-202-0012	JPC Stecker 3-10 / 0,1m r/s	100
616-202-0002	JPC Stecker 3-10 / 0,3m r/s	315
616-202-0003	JPC Stecker 3-10 / 0,6m r/s	600
616-202-0016	JPC Stecker 3-10 / 0,1m r/s	100

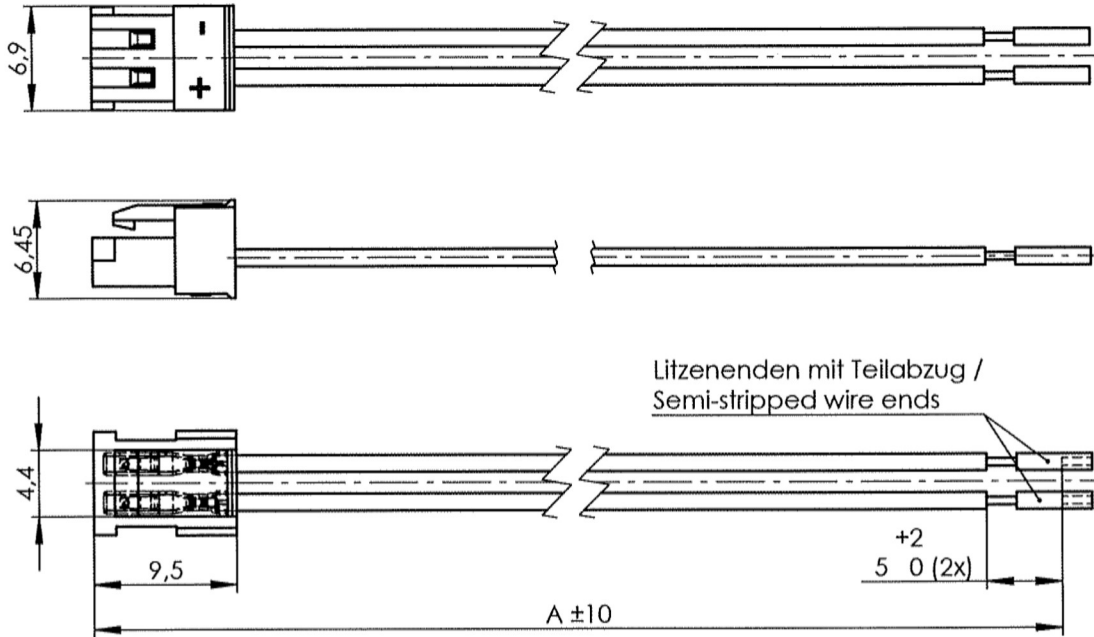

⑥ Bemerkungen, Litze:

Leiter: Cu-Litze, verzinkt;
 Isolation: PVC;
 Außendurchmesser: 1,12 ± 0,05 mm;
 Querschnitt: 24 AWG;
 Zulassung: UL 1061

⑥ Comments, single wire:

Conductor: tinned copper;
 Insulation: PVC;
 Outer diameter: 1,12 ± 0,05 mm;
 Cross-section: 24 AWG
 Approval: UL 1061

Zulässige Abweichung für Maße ohne Toleranzangabe Unless otherwise specified tolerances				Format/Size: A4	Maßstab/Scale: 2:1	Gewicht/Weight: g		
6	26582	08.01.2016	GJO	Werkstoff: Material:				
5	26565	2015.12.11.	LMA	Benennung: Title: JPC Stecker 3-10				
4	24156	22.06.2012	GJO	JPC connector 3-10				
3	23849	2011.12.08.	GJO	Schutzvermerk ISO 16016 beachten Observe protection note ISO 16016				
2	23190	2010.11.03.	PKR					
1	0648	2005.10.26.	PKR					
Ind	Änderung-Nr. Change no.	Datum Date	Name By	Ter... tel. ...		Int. - Nr.: 616-202-0014	Freigabe-Nr.: Approval no.:	Blatt: Sheet: 1/1
Geprüft: 08.01.2016 Checked: TASNER				Ersatz für/Replacement for:				DIS 10005971/SWD/000/03
Erstellt: 21.06.2005 Created: KROZSER								