


Vario Clamp

Self-locking type, stepless adjustable opening angle, with hand lever

V/V2 40 ZL/ZR

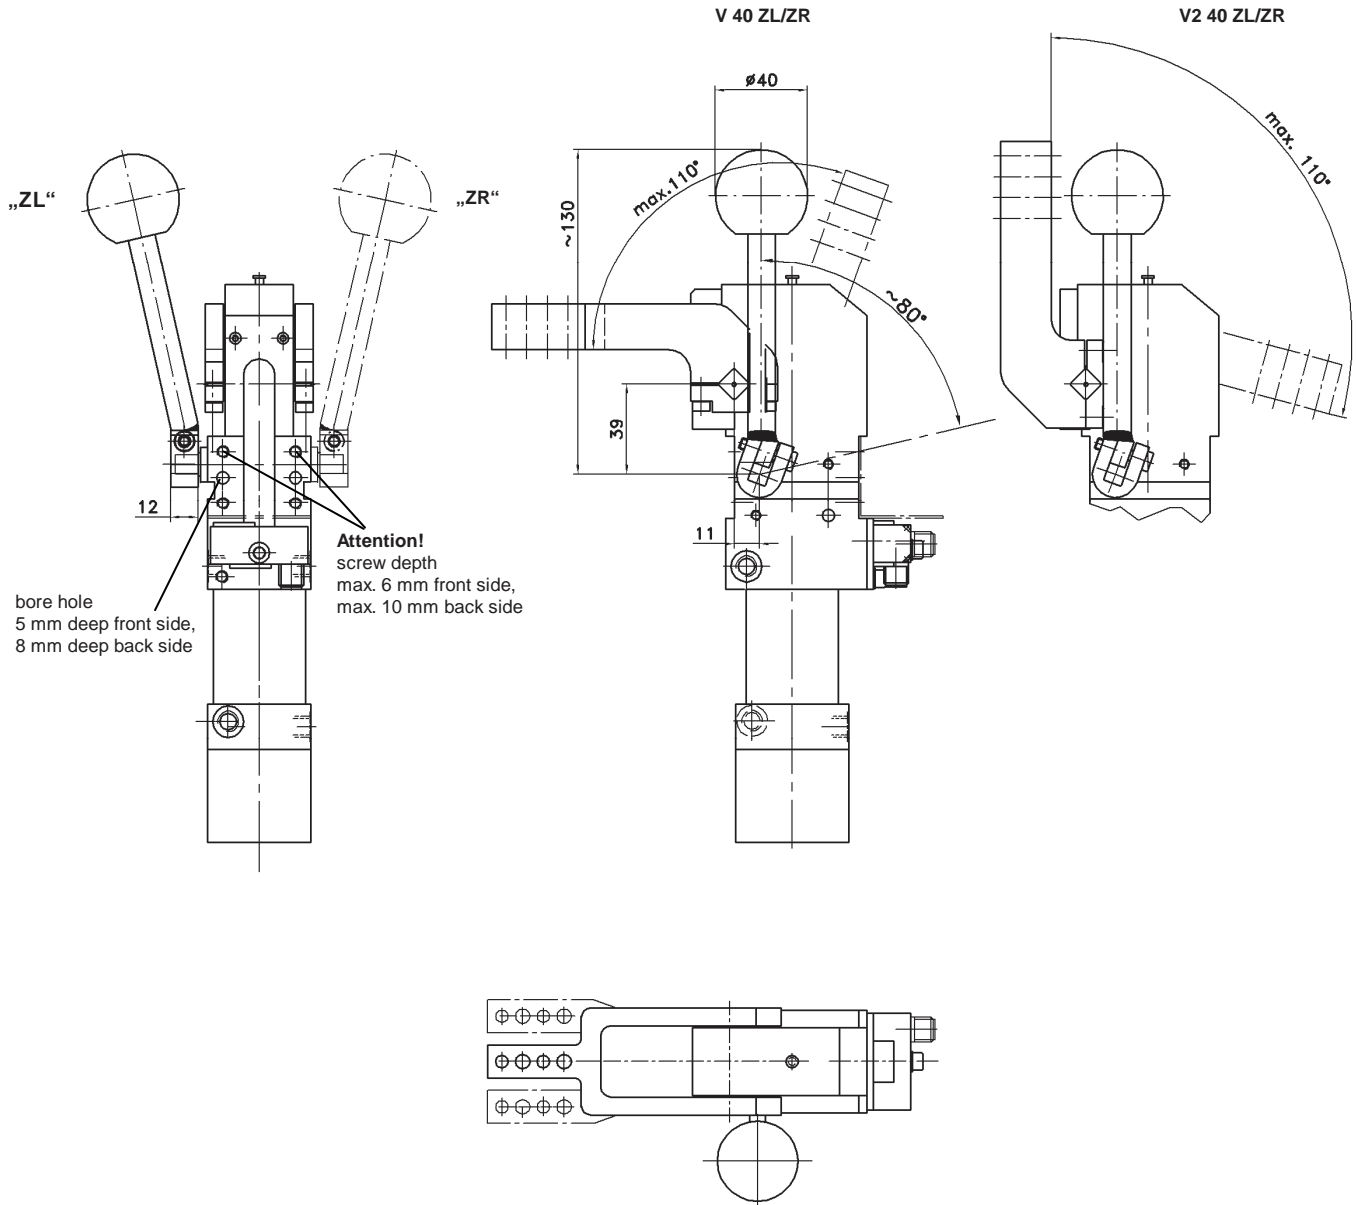

Attention!
screw depth
max. 6 mm front side,
max. 10 mm back side

bore hole
5 mm deep front side,
8 mm deep back side

Ordering example:

V 40 ZL A10 T12 110°

V:	Type
40:	Piston Ø
ZL:	Hand lever left ("ZR" = right)
A10:	Clamp arm version
T12:	Sensing system
110°:	Opening angle

Ordering example TÜNKERS sensing systems:

...T00	Without sensing
...T12	Inductive sensor 24 V, 1 output with integrated LED's.

Ordering example hand lever complete:

Hand lever complete left	= 350426
Hand lever complete right	= 350405

Opening angles:

Stepless adjustable from 56° to 110°.

Special opening angles:

From 5° to 55° on request.

A 5/3-way valve is required, central position de-aerated.

Weight: 2.65 kg

For further technical information see data sheet "V 40".

Medium: Air, max. 6 bar, operation permitted with oil-free air.

