


Flens- en asafmetingen voor Motoren IEC56 t/m 315, afmetingen in mm.

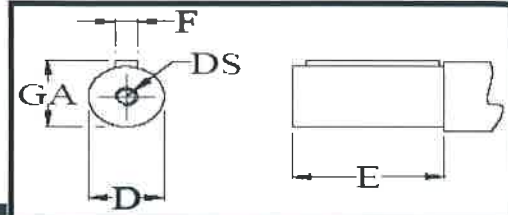

| | | | | | | | | | | | | | | | | | | | |
|----------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| IEC | 56 | 63 | 71 | 80 | 90 | 100 | 112 | 132 | 160 | 180 | 200 | 225 | 225 | 250 | 250 | 280 | 280 | 315 | 315 |
| Pooltaal | 2+4P | 2-6P | 2-8P | 2-8P | 2-8P | 2-8P | 2-8P | 2-8P | 2-8P | 2-8P | 2-8P | 2P | 4-8P | 2P | 4-8P | 2P | 2P | 2P | 4-8P |
| E | 20 | 23 | 30 | 40 | 50 | 60 | 60 | 80 | 110 | 110 | 110 | 110 | 140 | 140 | 140 | 140 | 140 | 140 | 170 |
| D | 9j6 | 11j6 | 14j6 | 19j6 | 24j6 | 28j6 | 28j6 | 38k5 | 42k6 | 48k6 | 55m6 | 55m6 | 60m6 | 60m6 | 65m6 | 65m6 | 75m6 | 65m6 | 80m6 |
| DS | M3 | M4 | M5 | M6 | M8 | M10 | M10 | M12 | M16 | M16 | M20 | M20 | M20 | M20 | M20 | M20 | M20 | M20 | M20 |
| GA | 10,2 | 12,5 | 16 | 21,5 | 27 | 31 | 31 | 41 | 45 | 51,5 | 59 | 59 | 64 | 64 | 69 | 69 | 79,5 | 69 | 85 |
| F | 3h9 | 4h9 | 5h9 | 6h9 | 8h9 | 8h9 | 8h9 | 10h9 | 12h9 | 14h9 | 16h9 | 16h9 | 18h9 | 18h9 | 18h9 | 18h9 | 20h9 | 18h9 | 22h9 |

| IEC | B5 | | | | | | B14a (C2) | | | | | | B14b (C1) | | | | | |
|-----|-----|-----|-----|-----|-----|------|-----------|-----|-----|-----|-----|----|-----------|-----|-----|-----|-----|------|
| | P | M | N | S | T | LA | P | M | N | S | T | LA | P | M | N | S | T | LA |
| 56 | 120 | 100 | 80 | 6,6 | 3 | 8 | 80 | 65 | 50 | M5 | 2,5 | x | 105 | 85 | 70 | M6 | 2,5 | 8 |
| 63 | 140 | 115 | 95 | 10 | 3 | 9 | 90 | 75 | 60 | M5 | 2,5 | x | 120 | 100 | 80 | M6 | 3 | 8 |
| 71 | 160 | 130 | 110 | 9 | 3,5 | 9 | 105 | 85 | 70 | M6 | 2,5 | x | 140 | 115 | 95 | M8 | 3 | 8 |
| 80 | 200 | 165 | 130 | 11 | 3,5 | 10 | 120 | 100 | 80 | M6 | 3 | x | 160 | 130 | 110 | M8 | 3,5 | 8 |
| 90 | 200 | 165 | 130 | 11 | 3,5 | 10 | 140 | 115 | 95 | M8 | 3,5 | x | 160 | 130 | 110 | M8 | 3 | 10 |
| 100 | 250 | 215 | 180 | 14 | 4 | 11 | 160 | 130 | 110 | M8 | 3,5 | x | 200 | 165 | 130 | M10 | 3,5 | 8,5 |
| 112 | 250 | 215 | 180 | 14 | 4 | 11 | 160 | 130 | 110 | M8 | 3,5 | x | 200 | 165 | 130 | M10 | 3,5 | x |
| 132 | 300 | 265 | 230 | 14 | 4 | 12 | 200 | 165 | 130 | M10 | 4 | 16 | 250 | 215 | 180 | M10 | 4 | 11,5 |
| 132 | 250 | 215 | 180 | 15 | 4 | 11,5 | x | x | x | x | x | x | x | x | x | x | x | x |
| 160 | 350 | 300 | 250 | 18 | 5 | 13 | x | x | x | x | x | x | x | x | x | x | x | x |
| 160 | 300 | 265 | 230 | 15 | 4 | 16 | x | x | x | x | x | x | x | x | x | x | x | x |
| 180 | 350 | 300 | 250 | 18 | 4 | 13 | x | x | x | x | x | x | x | x | x | x | x | x |
| 200 | 400 | 350 | 300 | 18 | 4 | 16,5 | x | x | x | x | x | x | x | x | x | x | x | x |
| 225 | 450 | 400 | 350 | 18 | 5 | 18 | x | x | x | x | x | x | x | x | x | x | x | x |
| 250 | 550 | 500 | 450 | 18 | 5 | 19 | x | x | x | x | x | x | x | x | x | x | x | x |
| 280 | 550 | 500 | 450 | 18 | 5 | 20 | x | x | x | x | x | x | x | x | x | x | x | x |
| 315 | 660 | 600 | 550 | 22 | 6 | 22 | x | x | x | x | x | x | x | x | x | x | x | x |

KOLMERELEKTROMOTOREN

Kortsluitanker draaistroom motoren as/flensafmetingen