


IG5499

IGA3005-BPKG/6M/PH

Inductive sensors

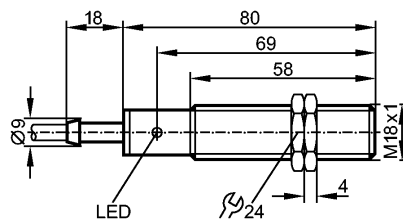

Product characteristics

Inductive sensor
Metal thread M18 x 1
Cable
Sensing range 5 mm; [f] flush mountable

Electrical data

Electrical design	DC PNP
Operating voltage [V]	10...36 DC
Current consumption [mA]	15 (24 V)
Protection class	II
Reverse polarity protection	yes

Outputs

Output function	normally open
Voltage drop [V]	< 2.5
Current rating [mA]	250
Short-circuit protection	pulsed
Overload protection	yes
Switching frequency [Hz]	500

Range

Sensing range [mm]	5
Real sensing range (Sr) [mm]	5 ± 10 %
Operating distance [mm]	0...4.05

Accuracy / deviations

Correction factors	mild steel = 1 / stainless steel approx. 0.7 / brass approx. 0.4 / Al approx. 0.3 / Cu approx. 0.2
Hysteresis [% of Sr]	1...15
Switch-point drift [% of Sr]	-10...10

Environment

Ambient temperature [°C]	-25...80
Protection	IP 67

Tests / approvals

EMC	EN 60947-5-2 EN 55011: class B
MTTF [Years]	1884

Mechanical data

Mounting	flush mountable
Housing materials	Brass white bronze coated; active face: PC (polycarbonate)
Weight [kg]	0.335

IG5499

IGA3005-BPKG/6M/PH

Inductive sensors

Displays / operating elements

Output status indication	LED	yellow
--------------------------	-----	--------

Electrical connection

Connection	PUR / PVC cable / 6 m; 3 x 0.5 mm ²
------------	--


Wiring

Core colours

BN brown

BU blue

BK black



Accessories

Accessories (included)	2 lock nuts
------------------------	-------------

Remarks

Pack quantity	[piece]	1
---------------	---------	---