



TECHNICAL DATA

Transmission ratio	Maximum torque Nm [lbf-ft]				Weight kg [lb]
	540 rpm		1000 rpm		
	C1*	C2*	C1*	C2*	
1:1.5	190 [140.1]	127 [93.7]	183 [135]	122 [90]	4,3 [9.5]
1:2	170 [125.4]	85 [62.7]	156 [115.1]	78 [57.5]	4,3 [9.5]
1:2.5	178 [131.3]	71 [52.4]	163 [120.2]	65 [47.9]	4,2 [9.3]
1:3	201 [148.2]	67 [49.4]	—	—	4,1 [9]
1:3.5	213 [157.1]	61 [45]	—	—	4 [8.8]
1:3.8	182 [134.2]	47 [34.7]	—	—	4 [8.8]


* Maximum torque on pump:
C1= maximum starting torque; C2= maximum torque for continuous duty.

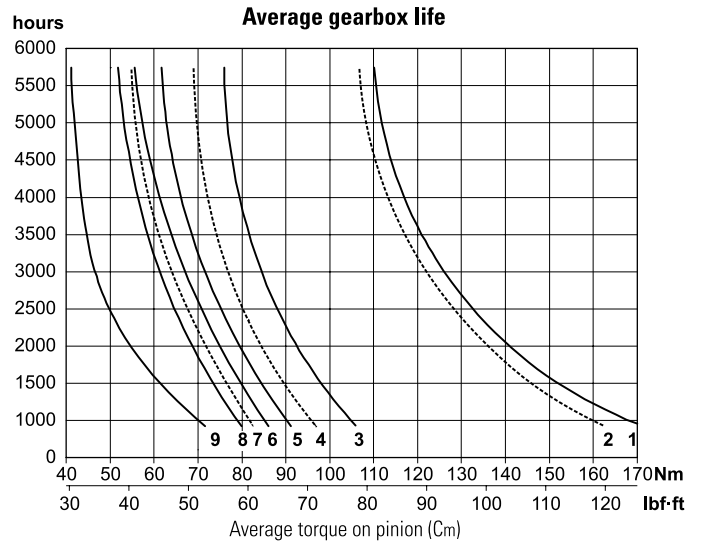

Mounting positions	Oil liters [US gallon]
1	0,15 [0.04]
2	0,11 [0.03]
3	0,09 [0.02]

Input rpm	Output (transmission ratio)						
	1 : 1,5	1 : 2	1 : 2,5	1 : 3	1 : 3,5	1 : 3,8	
540	curve	1	3	5	6	8	8
	rpm	810	1080	1350	1680	1836	2052
1000	curve	2	4	7	—	—	—
	rpm	1500	2000	2500	—	—	—

SPARE PARTS

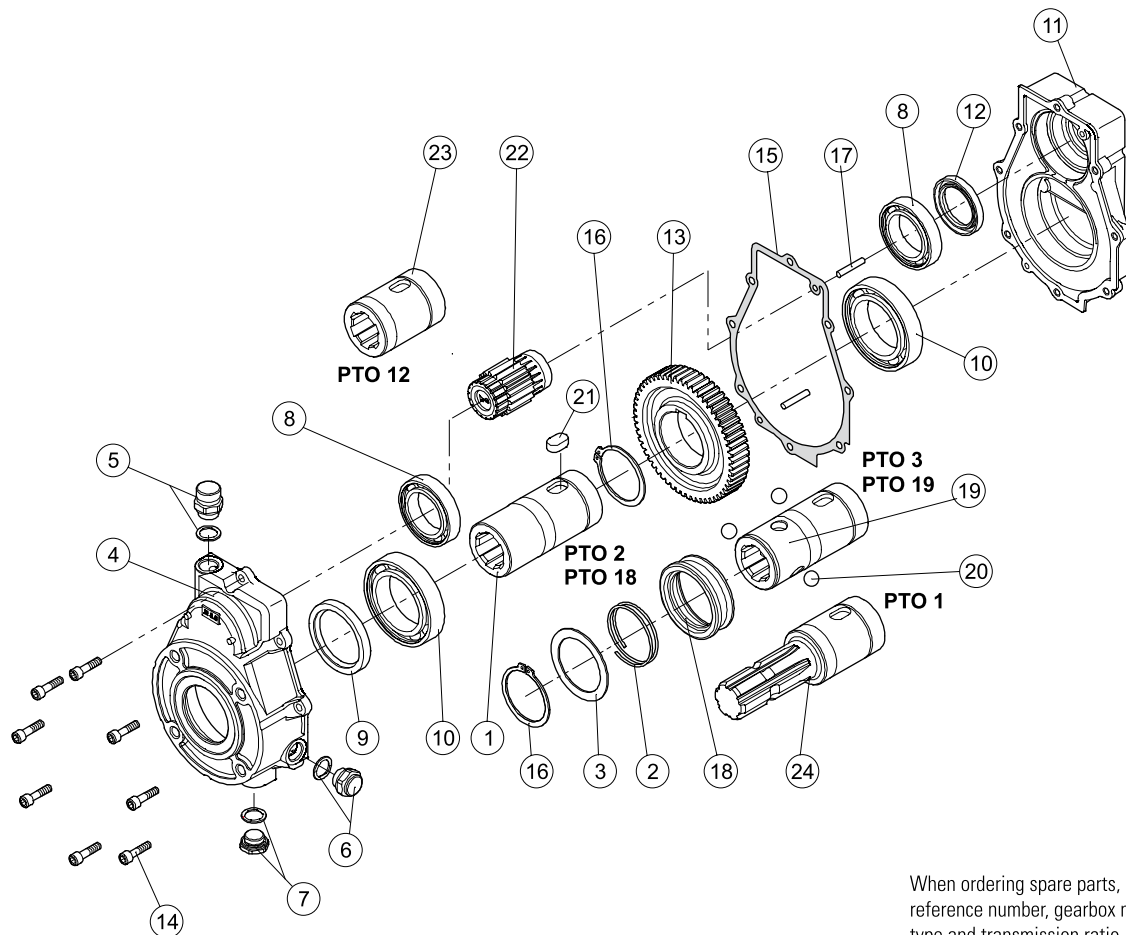

When ordering spare parts, specify reference number, gearbox model, PTO type and transmission ratio.