


Inductive sensors

SI4M225-G**Inductive proximity switch****dimension drawing****general data**

mounting type	flush
nominal sensing distance S_n	1 mm
hysteresis	2 ... 20 % of S_r
output indicator	LED red

electrical data


switching frequency	< 5 kHz
voltage supply range +Vs	10 ... 30 VDC
current consumption max. (no load)	12 mA
output circuit	NPN make function (NO)
voltage drop V_d	< 2 VDC
output current	< 100 mA
short circuit protection	yes
reverse polarity protection	yes

mechanical data

type	cylindrical smooth
material (sensing face)	LCP
housing material	stainless steel
dimension	4 mm
housing length	25 mm
connection types	cable, 2 m

ambient conditions

operating temperature	-25 ... +75 °C
protection class	IP 67

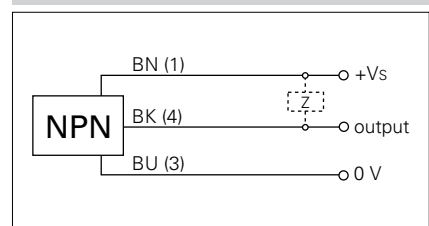photo**connection diagram****CE**


- standard execution with PUR cable
- 25 mm housing length

Inductive sensors

SI4N225-G

Inductive proximity switch

dimension drawing



general data

mounting type	shielded
nominal sensing distance S_n	1 mm
hysteresis	2 ... 20 % of S_r
output indicator	LED red

electrical data

switching frequency	< 5 kHz
voltage supply range +Vs	10 ... 30 VDC
current consumption max.	12 mA
output circuit	PNP make function (NO)
voltage drop V_d	< 2 VDC
output current	< 100 mA
short circuit protection	yes
reverse polarity protection	yes

mechanical data

type	cylindrical smooth
material (sensing face)	LCP
housing material	stainless steel
dimension	4 mm
housing length	25 mm
connection types	cable, 2 m


ambient conditions

operating temperature	-25 ... +75 °C
protection class	IP 67

photo



connection diagram

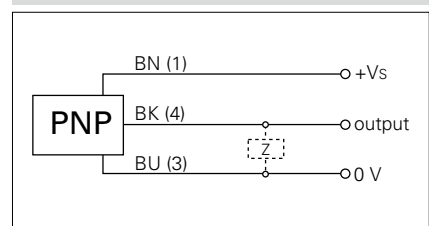

CE

- standard execution with PUR cable
- 25 mm housing length