


Earth Tags

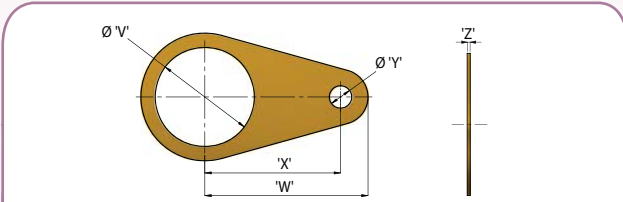

SELECTION TABLE

Metric Gland Size 'V'	'Y'	'W'	'X'	'Z'
M20	6.75	39.6	33.1	1.6
M25	6.85	45.5	36.5	1.6
M32	12.6	52.0	40.9	1.6
M40	13.4	59.6	44.2	1.6
M50	13.5	78.9	58.1	1.6
M63	13.5	87.6	66.8	1.6
M75	13.5	93.7	72.9	1.6
M80	14.0	128.0	104.0	3.0
M90	14.0	128.0	104.0	3.0
M100	14.0	128.0	104.0	3.0

All dimensions in millimetres.

Application

- Provides an earth bond attachment for a cable gland.

Features


- Manufactured in Brass (standard).
- Stainless Steel earthtags are available, but dimensions may differ slightly to those stated in the selection table. Please contact Hawke Technical Sales for details.

Ordering Information

Format for ordering is as follows:

Type	Size / Thread
Earthtag	M25

Locknut

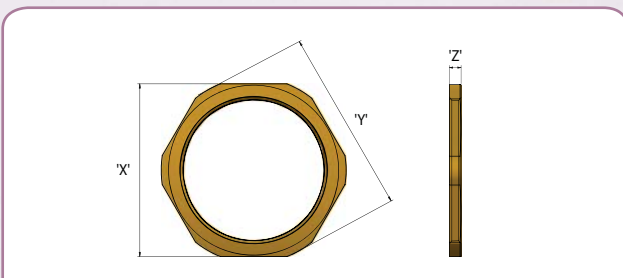

SELECTION TABLE

Metric Gland Size	Metric x 1.5mm Pitch			NPT			
	Across Flats 'X'	Across Corners 'Y'	'Z'	NPT* Gland Size	Across Flats 'X'	Across Corners 'Y'	'Z'
M16	19.0	21.9	3.2	-	-	-	-
M20	24.0	26.9	4.0	½"	30.0	33.6	4.7
M20	24.0	26.9	4.0	¾"	30.0	33.6	4.7
M25	30.0	33.6	4.0	1"	36.0	40.3	6.4
M32	46.0	53.1	4.0	1¼"	46.0	53.1	6.4
M40	46.0	53.1	4.8	1½"	55.0	61.6	6.4
M50	65.0	72.8	4.7	2"	65.0	72.8	6.4
M63	80.0	89.6	6.4	2½"	80.0	89.6	6.4
M75	95.0	107.0	6.4	3"	95.0	107.0	6.4
M80	106.4	119.2	10.0	3½"	127.0	143.0	9.0
M90	106.4	119.2	10.0	3½"	127.0	143.0	9.0
M100	127.0	142.2	10.0	4"	139.7	158.0	9.0

All dimensions in millimetres (except * where dimensions are in inches).

Application

- Secures a cable gland in position at the equipment.

Features

- Heavy duty locknuts manufactured in Brass (standard).
- Stainless Steel locknuts are available, but dimensions may differ slightly to those stated in the selection table. Please contact Hawke Technical department for details.

Ordering Information

Format for ordering is as follows:

Type	Size / Thread
Locknut	M25